

# ADDENDUM NUMBER 2 TO MAINTENANCE MANUAL

LBI-39123H


Refer to ECO#20043005

## GENERAL

This addendum documents a change to the Receiver IF Module (19D902783G7 & G11) Maintenance Manual. Torque specification changed from 20 in-lbs. to  $12.5 \pm 2.50$  in-lbs.

## CHANGES

On page 10, update drawing 19D902783 with revision 6.

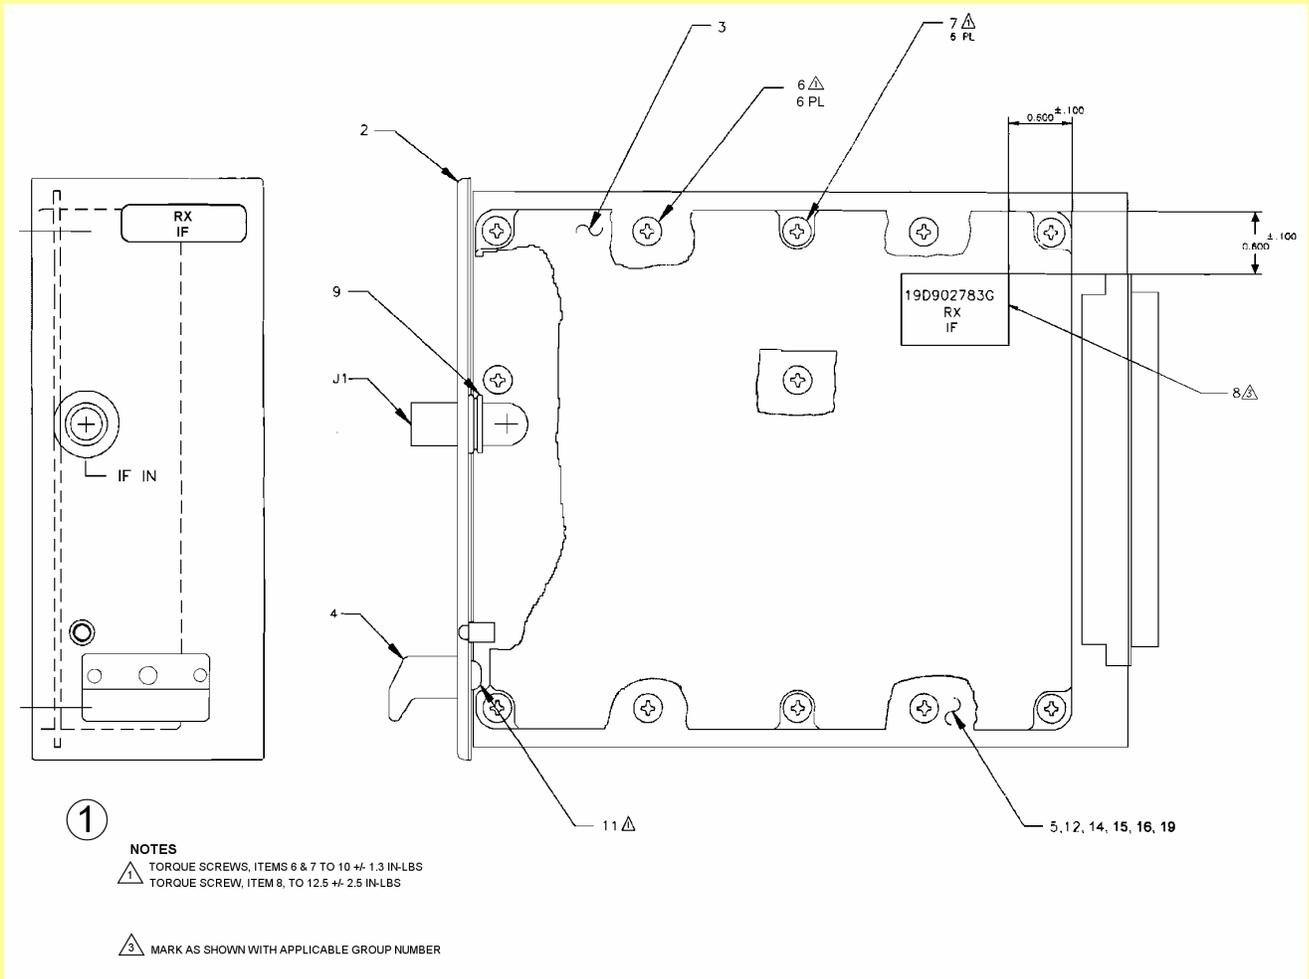

(19D902783, Rev. 6)

**M/A-COM Wireless Systems**

221 Jefferson Ridge Parkway

Lynchburg, Virginia 24501

(Outside USA, 434-385-2400) Toll Free 800-528-7711

[www.macom-wireless.com](http://www.macom-wireless.com)

Printed in U.S.A.


# ADDENDUM NUMBER 1 TO MAINTENANCE MANUAL

**LBI-39123H**

Refer to ECO#20026883

## GENERAL

This addendum updates the Assembly Diagram for Receiver IF Module 19D902783G7 & G11 in Maintenance Manual LBI-39123.

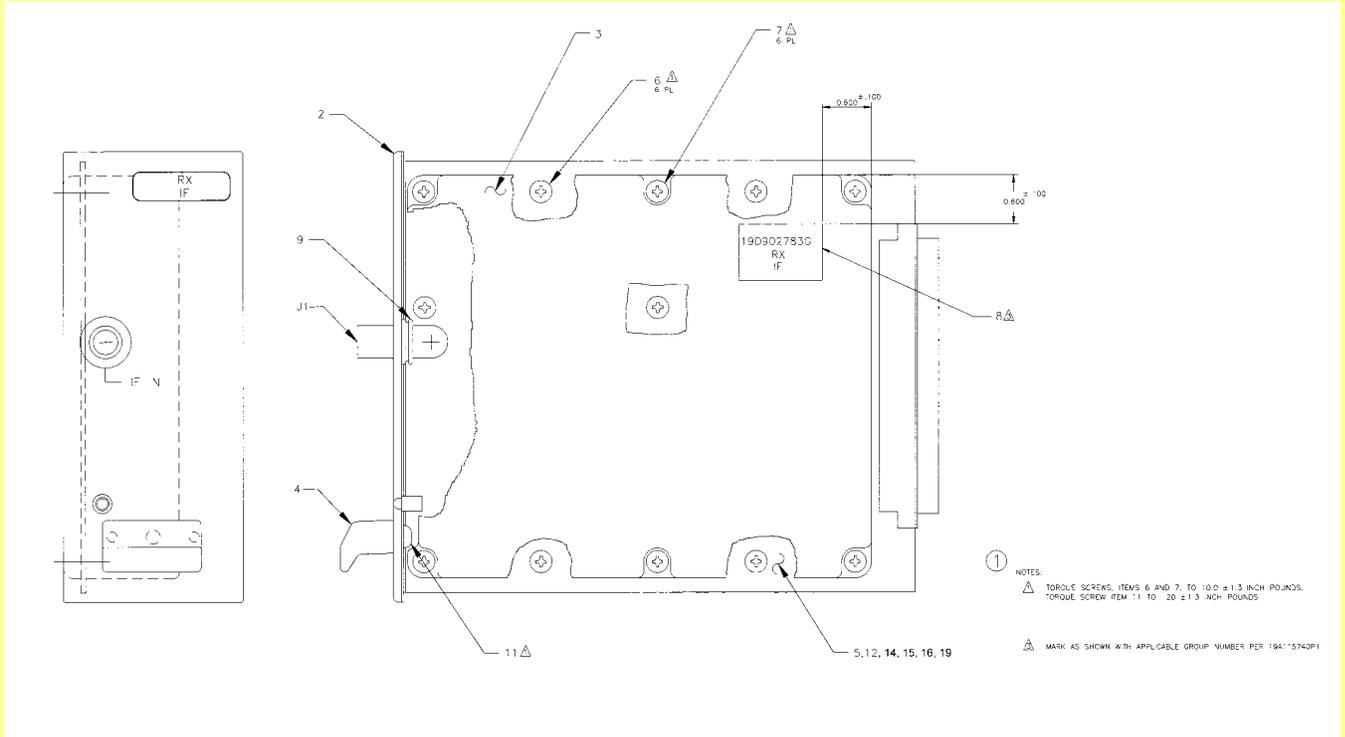

## RECEIVER IF MODULE

**19D902783G7 & G11**

(19D902783, Rev. 5)

**M/A-COM Wireless Systems**

221 Jefferson Ridge Parkway

Lynchburg, Virginia 24501

(Outside USA, 434-385-2400) Toll Free 800-528-7711

[www.macom-wireless.com](http://www.macom-wireless.com)

Printed in U.S.A.

**21.4 MHz RECEIVER IF MODULE  
12.5/25 kHz CHANNEL SPACING  
19D902783G7 & G11**

**TABLE OF CONTENTS**

	<u>Page</u>
DESCRIPTION.....	3
CIRCUIT ANALYSIS.....	4
INPUT AMPLIFIER NETWORK.....	4
CRYSTAL FILTERS, IF AMPLIFIERS.....	4
OSCILLATOR/MIXER/DETECTOR.....	4
AUDIO AMPLIFIER.....	5
SQUELCH.....	6
Buffer Amplifier.....	6
Bandpass Filter.....	6
Noise Detector.....	6
DC Amplifier.....	6
Schmitt Trigger.....	7
FAULT DETECTOR.....	7
VOLTAGE REGULATOR.....	7
ADDRESS DECODER.....	7
MAINTENANCE.....	8
RECOMMENDED TEST EQUIPMENT.....	8
ALIGNMENT PROCEDURE.....	8
TROUBLESHOOTING.....	8
ASSEMBLY DIAGRAM.....	10
PARTS LIST.....	11
PRODUCTION CHANGES.....	16
IC DATA.....	17
OUTLINE DIAGRAM.....	21
SCHEMATIC DIAGRAM.....	23

---

---

This manual is published by **M/A-COM Private Radio Systems, Inc.**, without any warranty. Improvements and changes to this manual necessitated by typographical errors, inaccuracies of current information, or improvements to programs and/or equipment, may be made by **M/A-COM Private Radio Systems, Inc.**, at any time and without notice. Such changes will be incorporated into new editions of this manual. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, for any purpose, without the express written permission of **M/A-COM Private Radio Systems, Inc.**

Copyright© 1994 – 2002, M/A-COM Private Radio Systems, Inc. All rights reserved.

## DESCRIPTION

The MASTR III Receiver IF Module 19D902783G7/G11<sup>1</sup> provides amplification and demodulation of the 21.4 MHz Intermediate Frequency (IF) signal. The IF Module also includes the receiver squelch circuitry. However, it does not include de-emphasis or squelch audio gating circuits. Figure 1 is a block diagram showing the functional operation of the IF Module.

The IF Module circuitry contains the following:

- A 50 ohm input impedance IF Amplifier
- A chain of two crystal filters and an integrated circuit IF amplifier
- An integrated circuit containing a crystal oscillator, mixer, limiter, and quadrature detector
- A variable gain AF amplifier
- A squelch circuit
- A fault detector circuit
- An integrated circuit voltage regulator
- An address decoder

**Table 1 - General Specifications**

ITEM	SPECIFICATION
I.F. frequency	21.4 MHz
Input Impedance	50 ohm
I2 dB SINAD	-120 dBm (25 kHz); -119 dBm (12.5 kHz)
Adj. CH SEL	-90 dB (25 kHz); -80 dB (12.5 kHz)
Image	-100 dB
3rd order Intercept Pt	23 dBm (25 kHz); 11 dBm *(12.5 kHz) *@ 50 kHz offset
Variation of Sensitivity with Signal Frequency	2 kHz (25 kHz); 1 kHz (12.5 kHz)
2nd I.F. frequency	455 kHz
2nd L.O. frequency	20.945 MHz
AF output (J2 pin 31C)	1 Vrms adjustable (with standard input signal)
AF output impedance	1k ohm
AF distortion	5% (25 kHz); 5% (12.5 kHz)
<u>AF response</u>	
10 Hz	-3 dB
300 Hz	±1 dB
1000 Hz	0 dB reference
3 kHz	±1 dB
Hum & Noise	-55 dB (25 kHz); -50 dB (12.5 kHz)
RSSI output (J2 pin 20C)	0.7 to 2.7 VDC prop to log (sig level)
RSSI time constant	5 ms
SQ Threshold Sensitivity	-123 dBm (25 kHz); -122 dBm (12.5 kHz)
SQ Maximum Sensitivity	-110 dBm (25 kHz); -109 dBm (12.5 kHz)
SQ Clipping	3 kHz
SQ Attack	150 ms
SQ Close	250 ms
SQ output (J2 pin 26C)	5V logic (low = squelched)
Fault output (J2 pin IIC)	5V logic (low = fault)
DC Supply	13.8V, 150 mA max.; 12.0V, 18 mA max.

<sup>1</sup> 21.4 MHz Receiver IF Module 19D902783G7 was replaced by 19D902783G11. G7 is no longer available.

## **CIRCUIT ANALYSIS**

### **INPUT AMPLIFIER NETWORK**

The input amplifier, consisting of Q2 and T1, provides a 50 ohm load for the receiver RF module.

Capacitor C1 provides AC coupling and a DC block on the input line (J1). This DC block protects the module in the event of a failure in a preceding module.

C1 and L9 are series-resonant at 21.4 MHz and provide a low-impedance path from J1 to amplifier Q2. C89 and L8 are parallel-resonant at 21.4 MHz and provide a path to the 50-ohm lead, R105, for mixer products other than 21.4 MHz.

### **CRYSTAL FILTERS, IF AMPLIFIERS**

Y1, Y2, U1, and associated circuitry provide IF filtering and amplification at 21.4 MHz. Filters Y1 and Y2 are both 4-pole bandpass filters with a center frequency of 21.4 MHz and a bandwidth of  $\pm 6.5$  kHz. Amplifier U1 is an integrated-circuit amplifier. U1 provides 30 dB of gain. The amplifier and filters have terminal impedances of 50 ohms. In-circuit gain measurements can be made using a high impedance probe.

Inductors L3, L5 and associated resistors and capacitors provide power supply decoupling. R3 provides a path to the input of the Fault Detector circuit. This input enables the Fault Detector circuit to monitor the DC voltage of U1.

The RF level detector consists of transistor Q1 along with associated resistors and capacitors. This detector plays no role in the normal operation of the IF Module, but aids in unit testing and module troubleshooting.

### **OSCILLATOR/MIXER/DETECTOR**

Integrated circuit U3 provides several functions including 2nd mixer, IF amplifier and limiter, and quadrature detector.

The 20.945 MHz crystal oscillator provides local oscillator injection to the mixer in U3. This mixer converts the 21.4 MHz IF signal to 455 kHz. C20 and C21 are oscillator feedback capacitors and have been chosen to provide the proper capacitance for crystal Y3. The proper oscillator output level is difficult to measure directly without affecting the oscillation.

A preferable measurement is at TP3 which should read about 10 mV pk. (*Measured using a 10 megohm 11 pF oscilloscope probe.*)

The mixer is internally connected to the crystal oscillator. Pins 1 and 20 of U3 are the mixer input and output respectively. Typical mixer conversion loss is about 2 dB.

In the 12.5 kHz mode, the output of the mixer drives the IF amplifier via analog switch U11-2, filter FL1 and analog switch U11-3. In the 25 kHz mode, the mixer output is routed through analog switch U11-1 and C85 to the IF amplifier. The

analog switches are controlled by the signal at point 'A'; high for 25 kHz, low for 12.5 kHz.

The IF amplifier output drives the limiter via the 6-pole ceramic filter FL2.


A received-signal-strength indicator (RSSI) is provided at U3 Pin 7. This indicator signal is generated within the limiter circuitry and provides an output current proportional to the logarithm of the input signal strength. This current develops a voltage across R18. The voltage varies from about 1 Vdc for noise input, to about 1.4 Vdc for a 12 dB SINAD signal, to a maximum of about 4.8 VDC for a high signal level (70 dB stronger than that required for 12 dB SINAD).

The quadrature detector provides a demodulated audio frequency output. The input to the detector is internally connected to the limiter and is not externally available. The output of the detector is U3 pin 9. C28 provides low-pass filtering to remove 455 kHz feedthrough. Ceramic resonator Y4 provides the frequency selective component needed for FM demodulation. Y4 replaces the typical LC resonant circuit found in most quadrature detectors. In contrast to the typical LC network, Y4 requires no adjustment.

The DC supply to U3 is provided through voltage dropping resistor R11 to U3 pin 6. R12 provides a path to the input of the Fault Detection circuit. This enables the Fault Detector to monitor the DC voltage on U3.

### **AUDIO AMPLIFIER**

Operational amplifier U6.3 provides audio frequency amplification. Its gain is set by its associated resistors, including variable resistor VR1. VR1 allows for adjusting the AF output level to 1 Vrms with a standard input signal to the module (1 kHz AF, 3 kHz peak deviation). In the 12.5 kHz mode, the demodulated audio is at a lower level than in the 25 kHz mode. The gain of amplifier U6.3 is, therefore, increased to give the same 1V rms output with a standard input signal to the module of 1.5 kHz deviation. This is done by transistor switch Q6 connecting R1 across R40. U6.2 is used as a voltage regulator to provide 4 VDC for biasing the operational amplifier.

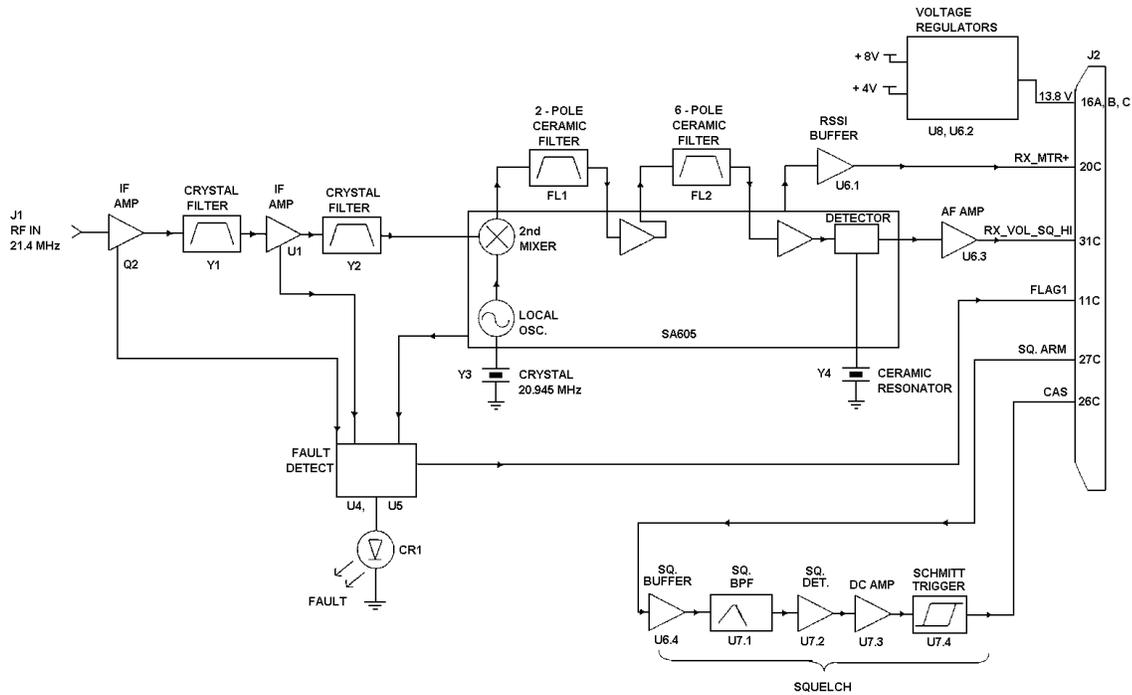

**Figure 1 – 21.4 MHz IF Module Block Diagram**

**SQUELCH**

**Buffer Amplifier**

Integrated circuit U6.4 is configured as a unity gain buffer amplifier. It provides a high input impedance to minimize loading of the previous circuits.

**Bandpass Filter**

The audio frequency bandpass filter consists of U7.1 and its associated circuitry. The purpose of this filter is to reject all voice frequencies and allow only demodulated noise to pass. The functioning of the squelch circuit depends upon the presence or absence of this noise. (When a signal is being received, i.e. the receiver is quiet, the squelch circuit senses the absence of noise and unquietes the radio.)

**Noise Detector**

U7.2 along with associated components act as a noise detector. The rectified output of U7.2 charges C11/C44 to a nearly constant DC voltage.

**DC Amplifier**

U7.3 is configured as a basic amplifier with a gain of 3.

### **Schmitt Trigger**

U7.4 is configured as an amplifier with positive feedback. This arrangement provides hysteresis in the output versus input characteristic. This eliminates the possibility of the squelch circuit repeatedly cutting in and out when the input signal is near a threshold. R56 and R57 act as a voltage divider to provide a 5 volt logic level output. (Logic High = unsquelched)

### **FAULT DETECTOR**

U4 and U5 are voltage comparators. These are configured into four "window detectors" which sense the presence of voltages within specified ranges (windows).

The four window detector circuits are U4.1 & U4.2, U4.4 & U4.3, U5.1 & U5.2, and U5.4 & U5.3. These monitor DC operating voltages on U6.2, U1, Q2, and U3 respectively. R29 and R30 comprise a voltage divider to provide a 5 volt logic level output. A fault is indicated when the output drops to zero.

Diode D1 and transistor Q3 monitor the output of the 8V regulator. D1 is a 8.2 volt breakdown diode. If the regulator output voltage should rise above 8.9 V (8.2 + 0.7 base-emitter drop) Q1 will turn on and a fault will be indicated.

Transistors Q4 and Q5 are drivers for the front panel LED CRI. These are powered from the +13.8 VDC line before the 8V regulator. Therefore, if the regulator opens, a fault will still be indicated.

### **VOLTAGE REGULATOR**

U8 is a monolithic integrated-circuit voltage regulator providing 8 VDC. This powers all circuitry in the module with the exception of Q2, the front panel LED and its drivers.

### **ADDRESS DECODER**

The address decoder consists of U2, an 8-stage shift register, and U9, a BCD-to-decimal decoder. When A2, A1 and A0 are '1', '1', '0', respectively and the ENABLE line is high, Q7 on U9 goes high. This enables data input to U2 to propagate through it, controlled by the clock pulses on U2-3. When the ENABLE signal goes low, U9-4 goes low, and the shift-register outputs are latched. Q1 on U2 is then high for the 12.5 kHz mode, and low for the 25 kHz mode.

## **MAINTENANCE**

### **RECOMMENDED TEST EQUIPMENT**

The following test equipment is required to test the IF Module.

1. FM Signal Generator; HP 8640B, HP 8657A, or equivalent
2. AF Generator or Function Generator
3. Audio Analyzer; HP 8903B, HP 339A, or equivalent
4. Oscilloscope
5. Frequency Counter; Racal-Dana 9919 or equivalent
6. DC Meter for troubleshooting
7. Power Supply; 13.8 VDC @ 150 mA
8. Power Supply; 12 VDC @20 mA

### **ALIGNMENT PROCEDURE**

1. Apply 13.8 VDC and 12 Vdc supplies to module.
2. Verify 13.8 VDC current consumption is between 90 and 150 mA, and 12 VDC current is between 12 and 18 mA.
3. Verify fault output is 0 to 0.5 VDC and front panel LED is off.
4. Apply a standard input signal to the module input. (-60 dBm, 21.4 MHz signal modulated with 1 kHz AF, 3 kHz peak deviation).
5. Monitor TP5 with a high-impedance probe connected to the frequency counter. Adjust L10 for a reading of 455 kHz  $\pm$  100 Hz.
6. Set VRI for 1 Vrms  $\pm$ 3% at module output (pin 31C on 96 pin connector J2).

### **TROUBLESHOOTING**

When troubleshooting the module, it is most convenient if the standard test fixture is used. The following conditions are with the module in the 25 kHz mode. This can be set up using a PC with the necessary software connected to the test fixture. Alternatively, a wire link can be soldered between holes H1 and H2 on the PC board.

IF amplifier Q2 has a nominal 8 dB gain. U1 has a nominal gain of 30 dB. The mixer has about 2 dB loss with proper LO injection. The proper crystal oscillator level is 10 mV pk measured at TP3.

The following four test points are provided on the PWB for additional test capability:

TP1: 60 mV pk @ 21.4 MHz with -30 dBm input signal

TP3: 10 mV pk @ 20.945 MHz independent of input signal


TP4: 20 mV pk @ 455 kHz with -60 dBm input signal

TP5: 750 mV pk @ 455 kHz with -60 dbm input signal  
 All RF voltages measured with 10 Megohm, 11 pF probe.

**Table 2 - Troubleshooting Guide**

<b>SYMPTOM</b>	<b>CHECK (CORRECT READING SHOWN)</b>	<b>INCORRECT READING INDICATES DEFECTIVE COMPONENT</b>
Fault indicator on	Check DC voltages +8V at U8 Pin 1 +4V at U6 Pin 7 5.5V at U1 output pin 6V at U3 Pin 5	If DC voltages not correct U8 or associated components U6 or associated components U1 or associated components U3 or associated components If DC voltages correct U4, U5, U6, DI, Q3, Q4, Q5
No audio - no noise	With no signal applied to module IF input Check for AF noise @ C29 ; 200mV Check for AF noise @ U6 Pin 14:1 V	U3 or associated components U6 or associated components
Noise only - no demodulated audio	Check crystal oscillator: TP3 10 mVpk 20.945 MHz Apply-30 dBm 21.4 MHz input, check TP1 60 mVpk Apply-60 dBm 21.4 MHz input, check TP4 20 mVpk	U3, Y3 or associated components Q2, Y1, U1 or associated components U3, FL1 or associated components
Poor 12 dB SINAD	Check crystal oscillator: TP3 10 mVpk 20.945 MHz Apply-30 dBm 21.4 MHz input, check TP1 60 mVpk Apply-60 dBm 21.4 MHz input, check TP4 20 mVpk	U3, Y3 or associated components Q6, Y1, U1 or associated components U3, FL1 or associated components
No squelch function	With squelch pot maximum, or with module AUDIO/SQUELCH/HI connected to SQUELCH/ARM input and with no signal to module IF input: Check Presence of 1 Vpk noise at U6 Pin 14  Check presence of 1 Vpk noise U7 at Pin 1 Check DC voltage U7 at Pin 8: 7V Check DC voltage U7 at Pin 14: 0.5V	U6 or associated components    U7 or associated components

# ASSEMBLY DIAGRAM

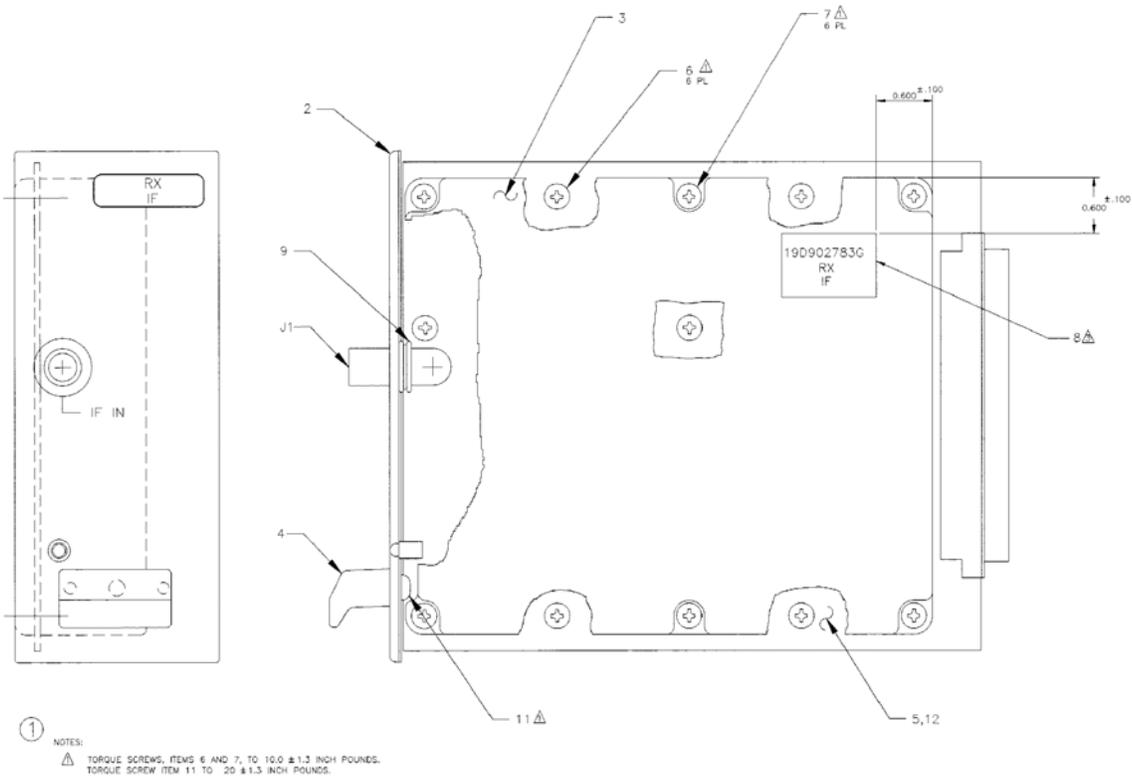

## RECEIVER IF MODULE 19D902783G, G11

(19D902783, Sh. 1, Rev. 4)

**RECEIVER IF MODULE  
19D902783G7, G11  
Issue 11**

SYMBOL	PART NUMBER	DESCRIPTION
		<b>19D902783G7(Obsolete)</b>
		----- MISCELLANEOUS -----
2	19D902508P1	Chassis.
3	19D902509P1	Cover.
4	19D902555P1	Handle.
6	19A702381P506	Screw, thread forming: TORX, No. M3.5-.6 x 6.
7	19A702381P513	Screw, thread forming: TORX, No. M3.5 - 0.6 X 13.
8	19B235310P1	Nameplate.
9	19B802690P1	Grommet
11	19A702381P508	Screw, thd. form: No. 3.5-0.6 x 8.
19	19A149009P1	Pad.
		<b>19D902494G7 &amp; G11</b>
		----- CAPACITORS -----
C1	19A702236P52	Ceramic: 120 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM/ C.
C2	19A702052P5	Ceramic: 1000 pF $\pm 10\%$ , 50 VDCW.
C3	19A702052P22	Ceramic: 0.047 $\mu$ F $\pm 10\%$ , 50 VDCW.
C4	19A702052P14	Ceramic: 0.01 $\mu$ F $\pm 10\%$ , 50 VDCW.
C5	19A702052P26	Ceramic: 0.1+ or $\mu$ F $\pm 10\%$ , 50 VDCW.
thru C7		
C8	19A702052P14	Ceramic: 0.01 $\mu$ F $\pm 10\%$ , 50 VDCW.
and C9		
C10	19A702052P5	Ceramic: 1000 pF $\pm 10\%$ , 50 VDCW.
C11	19A702052P26	Ceramic: 0.1 $\mu$ F $\pm 10\%$ , 50 VDCW.
C12	19A705205P12	Tantalum: .33 $\mu$ F, 16 VDCW; sim to Sprague 293D.
C13	19A702236P50	Ceramic: 100 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM/ C.
C14	19A702052P14	Ceramic: 0.01 $\mu$ F $\pm 10\%$ , 50 VDCW.
and C15		
C16	19A702236P50	Ceramic: 100 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM/ C.
C17	19A702052P26	Ceramic: 0.1 $\mu$ F $\pm 10\%$ , 50 VDCW.
and C18		
C19	19A702052P5	Ceramic: 1000 pF $\pm 10\%$ , 50 VDCW.
C20	19A702236P44	Ceramic: 56 pF $\pm 10\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM/ C.
C21	19A702236P54	Ceramic: 150 pF $\pm 10\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM/ C.
C22	19A702061P1	Ceramic: 1 pF $\pm 0.5\%$ pF, 50 VDCW.
C23	19A702052P26	Ceramic: 0.1 $\mu$ F $\pm 10\%$ , 50 VDCW.
thru C25		
C26	19A702061P33	Ceramic: 27 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM/ C.
C27	19A702052P26	Ceramic: 0.1 $\mu$ F $\pm 10\%$ , 50 VDCW.
C28	19A702236P50	Ceramic: 100 pF $\pm 5\%$ , 50 VDCW, temp coef 0 $\pm 30$ PPM/ C.
C29	19A705205P5	Tantalum: 6.8 $\mu$ F, 10 VDCW; sim to Sprague 293D.
C30	19A705205P2	Tantalum: 1 $\mu$ F, 16 VDCW; sim to Sprague 293D.
C31	19A705205P12	Tantalum: .33 $\mu$ F, 16 VDCW; sim to Sprague 293D.
C32	19A702052P26	Ceramic: 0.1 $\mu$ F $\pm 10\%$ , 50 VDCW.
thru C34		
C35	19A705205P2	Tantalum: 1 $\mu$ F, 16 VDCW; sim to Sprague 293D.
C36	19A705205P111	Tantalum: 47 $\mu$ F, 10 VDCW; sim to Sprague 293D.
C37	19A705205P2	Tantalum: 1 $\mu$ F, 16 VDCW; sim to Sprague 293D.
C38	19A702052P10	Ceramic: 4700 pF $\pm 10\%$ , 50 VDCW.
and C39		

\* COMPONENT ADDED, DELETED OR CHANGED BY PRODUCTION CHANGES.

# PARTS LIST

SYMBOL	PART NUMBER	DESCRIPTION
C40	19A702236P50	Ceramic: 10 0 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM/ C.
C41	19A702052P22	Ceramic: 0.047 µF ±10%, 50 VDCW.
C42	19A702061P77	Ceramic: 470 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM.
C43 and C44	19A702052P26	Ceramic: 0.1µF ±10%, 50 VDCW.
C45	19A702052P14	Ceramic: 0.01 µF ±10%, 50 VDCW.
C47 thru C48	19A702236 P50	Ceramic: 10 0 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM/ C.
C49	19A702052P14	Ceramic: 0.01 µF ±10%, 50 VDCW.
C50	19A702236P50	Ceramic: 10 0 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM/ C.
C51 and C52	19A702052P14	Ceramic: 0.01µF ±10%, 50 VDCW.
C53	19A705205P12	Tantalum: .33 µF, 16 VDCW; sim to Sprague 293D.
C54 and C55	19A702052P14	Ceramic: 0.01 µF ±10%, 50 VDCW.
C56	19A702236P50	Ceramic: 100 pF ±5%, 50 VDCW, temp coef 0+ or -30 PPM/ C.
C57 and C58	19A702052P14	Ceramic: 0.01 µF ±10%, 50 VDCW.
C59	19A702052P5	Ceramic: 1000 pF ±10%, 50 VDCW.
C60	19A702052P14	Ceramic: 0.01 µF ±10%, 50 VDCW.
C61	19A702052P5	Ceramic: 1000 pF ±10%, 50 VDCW.
C62	19A702052P14	Ceramic: 0.01 µF ±10%, 50 VDCW.
C67 thru C68	19A702052P5	Ceramic: 1000 pF ±10%, 50 VDCW.
C69	19A702052P14	Ceramic: 0.01 µF ±10%, 50 VDCW.
C70 and C71	19A702052P33	Ceramic: 0.1 µF ±10%, 50 VDCW.
C72	19A702236P50	Ceramic: 100 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM/ C.
C73	19A702236P50	Ceramic: 10 0 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM/ C.
C74 and C75	19A702052P14	Ceramic: 0.01 µF ±10%, 50 VDCW.
C76	19A705205P15	Tantalum: 33 µF, 16 VDCW; sim to Sprague 293D.
C77	19A702052P33	Ceramic: 0.1µF ±10%, 50 VDCW.
C78 and C79	19A702052P14	Ceramic: 0.01 µF ±10%, 50 VDCW.
C80	19A702236P50	Ceramic: 10 0 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM/ C.
C83 thru C84	19A705052P2	Tantalum: .1 µF, 16 VDCW; sim to Sprague 293D.
C85	19A702052P5	Ceramic: 10 00 pF ±10%, 50 VDCW.
C86	19A702052P14	Ceramic: 0.01 µF ±10%, 50 VDCW. (Used in G7).
C86	19A702236P48	Ceramic: 82 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM/ C. (Used in G11).
C87	19A702052P5	Ceramic: 1000 pF ±10%, 50 VDCW.
C89	19A702236P52	Ceramic: 120 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM/ C.
C92	19A702236P50	Ceramic: 100 pF ±5%, 50 VDCW, temp coef 0 ±30 PPM/ C.
CR1	19A703595P10	----- DIODES ----- Optoelectric: Red LED; sim to HP HLMP-1301-010. ----- DIODES -----
D1	19A700083P105	Silicon: Zener; 8.2 Volt.
D2	19A700155P2	Silicon: 100 mA, 35 PIV; sim to BAT 18.
FL1 and FL2	19A702171P2	----- FILTERS ----- Bandpass Filter: 455 ± 0.5 kHz, sim to Murata CFU455F2.
J1	19A115938P24	----- JACKS ----- Coaxial Connector.

SYMBOL	PART NUMBER	DESCRIPTION
J2	19B801587P7	Connector, DIN: 96 male contacts, right angle mounting; sim to AMP 650887-1.
		----- INDUCTORS -----
L1	19A705470P28	Coil: 1.8 mH, $\pm 20\%$ ; sim to Toko 380LB-1R8M.
L2	19A705470P35	Coil: 6.8 mH, $\pm 20\%$ ; sim to Toko 380LB-6R8M.
and L3		
L5	19A705470P35	Coil: 6.8 mH $\pm 20\%$ ; sim to Toko 380LB-6R8M.
L6	19A705470P24	Coil: 0.82 mH, $\pm 20\%$ ; sim to Toko 380NB-R82M. (Used in G11).
L7	19A705470P35	Coil: 6.8 mH $\pm 20\%$ ; sim to Toko 380LB-6R8M.
L8	19A705470P21	Coil, RF: 0.47 mH, $\pm 20\%$ ; sim to Toko 380NB-R42M.
and L9		
L10	19A703311P1	Coil, RF: sim to Toko American KON-K6572BA.
		----- TRANSISTORS -----
Q1	19A704708P2	Silicon, NPN: sim to NEC 2SC3356.
and Q2		
Q3	19A700076P2	Silicon, NPN: sim to MMBT3904, low profile.
thru Q9		
		----- RESISTORS -----
R1	19B800607P562	Metal film: 5.6 K ohms $\pm 5\%$ , 1/8 w. (Used in G7).
R1	19B800607P272	Metal film: 2.7 K ohms $\pm 5\%$ , 1/8 w. (Used in G11).
R2	19B800607P332	Metal film: 3.3K ohms $\pm 5\%$ , 1/8 w.
R3	REP645625/1	Metal film: 10K ohms $\pm 1\%$ , 1/8 w.
R4	REP645624/1	Metal film: 1K ohms $\pm 1\%$ , 1/8 w.
R5	19B800607P103	Metal film: 10K ohms $\pm 5\%$ , 1/8 w.
R6	19B800607P510	Metal film: 51 ohms $\pm 5\%$ , 1/8 w. (Used in G7).
R6	19B800607P221	Metal film: 220 ohms $\pm 5\%$ , 1/8 w. (Used in G11).
R7	19B800607P102	Metal film: 1K ohms $\pm 5\%$ , 1/8 w.
R8	19B800607P103	Metal film: 10K ohms $\pm 5\%$ , 1/8 w.
R9	19B800607P821	Metal film: 820 ohms $\pm 5\%$ , 1/8 w.
R10	19B800607P101	Metal film: 100 ohms $\pm 5\%$ , 1/8 w.
R11	REP645623/331	Metal film: 330 ohms $\pm 1\%$ , 1/8 w.
R12	REP645625/1	Metal film: 10K ohms $\pm 1\%$ , 1/8 w.
R13	19B800607P104	Metal film: 100K ohms $\pm 5\%$ , 1/8 w.
R14	19B800607P103	Metal film: 10K ohms $\pm 5\%$ , 1/8 w.
R15	19B800607P223	Metal film: 22K ohms $\pm 5\%$ , 1/8 w.
R16	19B800607P103	Metal film: 10 ohms $\pm 5\%$ , 1/8 w.
R17	19A702931P261	Metal film: 4220 ohms $\pm 1\%$ , 200 VDCW, 1/8 w.
R18	19A702931P401	Metal film: 100K ohms $\pm 1\%$ , 200 VDCW, 1/8 w.
R19	19B800607P101	Metal film: 100 ohms $\pm 5\%$ , 1/8 w.
R20	19B800607P100	Metal film: 10 ohms $\pm 5\%$ , 1/8 w.
R21	19B800607P472	Metal film: 4.7K ohms $\pm 5\%$ , 1/8 w.
and R22		
R23	REP645623/82	Metal film: 820 ohms $\pm 1\%$ , 1/8 w.
R24	REP645624/12	Metal film: 1.2K ohms $\pm 1\%$ , 1/8 w.
R25	REP645624/39	Metal film: 3.9K ohms $\pm 1\%$ , 1/8 w.
R26	REP645624/12	Metal film: 1.2K ohms $\pm 1\%$ , 1/8 w.
R27	REP645624/18	Metal film: 1.8K ohms $\pm 1\%$ , 1/8 w.
R28	REP645624/47	Metal film: 4.7K ohms $\pm 1\%$ , 1/8 w.
R29	19B800607P822	Metal film: 8.2K ohms $\pm 5\%$ , 1/8 w.
R30	19B800607P153	Metal film: 15K ohms $\pm 5\%$ , 1/8 w.
R31	19B800607P103	Metal film: 10K ohms $\pm 5\%$ , 1/8 w.
R32	19B800607P104	Metal film: 100K ohms $\pm 5\%$ , 1/8 w.
and R33		
R34	19B800607P153	Metal film: 15K ohms $\pm 5\%$ , 1/8 w.
R35	19B800607P122	Metal film: 1.2K ohms $\pm 5\%$ , 1/8 w.
R36	19B800607P104	Metal film: 100K ohms $\pm 5\%$ , 1/8 w.
and R37		
R39	19B800607P104	Metal film: 100K ohms $\pm 5\%$ , 1/8 w.

## PARTS LIST

SYMBOL	PART NUMBER	DESCRIPTION
R40	19B800607P332	Metal film: 3.3K ohms $\pm 5\%$ , 1/8 w.
R41	19B800607P123	Metal film: 12K ohms $\pm 5\%$ , 1/8 w.
R42	19B800607P104	Metal film: 100K ohms $\pm 5\%$ , 1/8 w.
R44	19B800607P682	Metal film: 6.8K ohms $\pm 5\%$ , 1/8 w.
R45	19B800607P333	Metal film: 33K ohms $\pm 5\%$ , 1/8 w.
R46	19B800607P104	Metal film: 100K ohms $\pm 5\%$ , 1/8 w.
R47	19B800607P563	Metal film: 56K ohms $\pm 5\%$ , 1/8 w.
R48	19B800607P822	Metal film: 8.2K ohms $\pm 5\%$ , 1/8 w.
R49	19B800607P103	Metal film: 10K ohms $\pm 5\%$ , 1/8 w.
R50	19B800607P104	Metal film: 100K ohms $\pm 5\%$ , 1/8 w.
R51	19B800607P334	Metal film: 330K ohms $\pm 5\%$ , 1/8 w.
R52	19B800607P103	Metal film: 10K ohms $\pm 5\%$ , 1/8 w.
R53	19B800607P223	Metal film: 22K ohms $\pm 5\%$ , 1/8 w.
and R54		
R55	19B800607P683	Metal film: 68K ohms $\pm 5\%$ , 1/8 w.
R56	19A702931P185	Metal film: 750 ohms $\pm 5\%$ , 1/8 w.
R57	19B800607P821	Metal film: 820 ohms $\pm 5\%$ , 1/8 w.
R58	19B800607P102	Metal film: 1K ohms $\pm 5\%$ , 1/8 w.
thru R60		
R61	19B800607P473	Metal film: 47K ohms $\pm 5\%$ , 1/8 w.
R62	19B800607P102	Metal film: 1K ohms $\pm 5\%$ , 1/8 w.
R63	REP645624/33	Metal film: 3.3K ohms $\pm 1\%$ , 1/8 w.
R64	19B800607P102	Metal film: 1K ohms $\pm 5\%$ , 1/8 w.
thru R66		
R67	19B800607P104	Metal film: 100K ohms $\pm 5\%$ , 1/8 w.
R68	19B800607P102	Metal film: 1K ohms $\pm 5\%$ , 1/8 w.
R69	19B800607P101	Metal film: 100 ohms $\pm 5\%$ , 1/8 w.
R70	19B800607P102	Metal film: 1K ohms $\pm 5\%$ , 1/8 w.
thru R74		
R75	REP645624/33	Metal film: 3.3K ohms $\pm 1\%$ , 1/8 w.
R76	REP645623/82	Metal film: 82 ohms $\pm 1\%$ , 1/8 w.
R77	REP645624/1	Metal film: 1K ohms $\pm 1\%$ , 1/8 w.
R78	REP645624/39	Metal film: 3.9K ohms $\pm 1\%$ , 1/8 w.
R79	REP645624/27	Metal film: 2.7K ohms $\pm 1\%$ , 1/8 w.
R80	REP645624/68	Metal film: 6.8K ohms $\pm 1\%$ , 1/8 w.
and R81		
R82	REP645625/1	Metal film: 10K ohms $\pm 1\%$ , 1/8 w.
R83	19B800607P473	Metal film: 47K ohms $\pm 5\%$ , 1/8 w.
and R84		
R85	19B800607P393	Metal film: 39K ohms $\pm 5\%$ , 1/8 w.
R86	19B800607P103	Metal film: 10K ohms $\pm 5\%$ , 1/8 w.
R87	19B800607P273	Metal film: 27K ohms $\pm 5\%$ , 1/8 w.
R88	19B800607P102	Metal film: 1K ohms $\pm 5\%$ , 1/8 w.
thru R93		
R94	19B800607P473	Metal film: 47K ohms $\pm 5\%$ , 1/8 w.
R95	19B800607P393	Metal film: 39K ohms $\pm 5\%$ , 1/8 w.
R96	19B800607P473	Metal film: 47K ohms $\pm 5\%$ , 1/8 w.
R97	19B801251P390	Metal film: 39 ohms $\pm 5\%$ , 1/10 w. (Used in G7).
R97	19B801251P180	Metal film: 18 ohms $\pm 5\%$ , 1/10 w. (Used in G11)
R98	19B801251P151	Metal film: 150 ohms $\pm 5\%$ , 1/10 w. (Used in G7).
and R99		
R98	19B801251P271	Metal film: 270 ohms $\pm 5\%$ , 1/10 w. (Used in G11).
and R99		
R100	19B800607P103	Metal film: 10K ohms $\pm 5\%$ , 1/8 w.
R101	19B800607P100	Metal film: 10 ohms $\pm 5\%$ , 1/8 w.
R103	19B800607P473	Metal film: 47K ohms $\pm 5\%$ , 1/8 w.
R105	19B800607P510	Metal film: 51 ohms $\pm 5\%$ , 1/8 w.
R106	19B800607P103	Metal film: 10K ohms $\pm 5\%$ , 1/8 w.

SYMBOL	PART NUMBER	DESCRIPTION
TP5	344A3367P1	----- TEST POINT ----- Test Point.
T1	REGUA10003/1	----- TRANSFORMERS ----- Transformer.
U1	344A3740P1	----- INTEGRATED CIRCUITS ----- Linear: Amp; sim to INA-02186.
U2	19A703987P324	8-Bit 3-State Shift Latch Register CMOS
U3	19A705535P3	Linear: RF/IF Signal Processor; sim to SA605N.
U4	19A704125P1	Linear: Quad Comparator; sim to LM339D.
and		
U5		
U6	RYT1016140/2	Linear: Rail-to-rail Op-Amp; sim to TLC274CDE.
U7	19A701789P4	Linear: Quad Operational Amplifier; LM224DP5.
U8	19A704971P10	Linear: 8V; Voltage Regulator.
U9	344A3064P201	Digital: 3-To-8 Line Decoder/Demultiplexer; sim to 74HCT138.
U10	19A704971P9	Voltage Regulator: +5V.
U11	RYT3066018/C	Switch, Bilateral: CMOS QUAD.
U12	19A703483P311	Digital: CMOS Quad-Input OR Gate; sim to 74HC32. (Used in G11).
VR1	19B800779P12	----- VARIABLE RESISTOR ----- Resistor, variable.
Y1	19A149974G7	----- CRYSTALS ----- Filter, Crystal: 21.4 MHz.
Y2	19A149974G8	Filter, Crystal: 21.4 MHz.
Y3	19A702289G8	Crystal: 20.945 MHz.
Y4	19A149976P1	Discriminator: 455 kHz.

## PRODUCTION CHANGES

Changes in the equipment to improve performance or to simplify circuits are identified by a "**Revision Letter**", which is stamped after the model number of the unit. The revision stamped on the unit includes all previous revisions. Refer to the Parts List for the descriptions of parts affected by these revisions.

### **REV. B - RECEIVER IF MODULE 19D902494G7**

To improve production of Group 7 boards. New schematic (193D1065).

### **REV. A - RECEIVER IF MODULE 19D902494G11**

To ensure correct operation. Replaced U7 (19A701789P4).

### **REV. B - RECEIVER IF MODULE 19D902494G11**

To increase margins on squelch threshold sensitivity and 12 dB SINAD in 12.5 kHz mode. Changed capacitor C86 and resistors R6 and R97, thru R99. C86 was 0.01  $\mu$ F (19A702052P14), resistor R6 was 50 ohms (19B800607P510), R97 was 39 ohms (19B801251P390) and R98 and R99 were 150 ohms (19B801251P151). Added L6 (19A705430P24).

### **REV. C – RECEIVER IF MODULE 19D902494G7 & G11**

To eliminate interference and improve operation. Changed Capacitor C36, resistors R26-R28, R56 and op-amp U2. Deleted resistors R38 and R43.

Capacitor C36 was 19A705205P5 (6.8 $\mu$ F)	Resistor R38 was 19B800607P102 (1K)
Resistor R26 was 19B800607P272 (2.7K)	Resistor R43 was 19B800607P102 (1K)
Resistor R27 was 19B800607P102 (1K)	Resistor R56 was 19B800607P181 (180 $\Omega$ )
Resistor R28 was 19B800607P272 (2.7K)	Op-Amp U6 was 19A701789P4

### **REV. D – RECEIVER IF MODULE 19D902494G7 & G11**


To improve fault detection monitoring. Changed resistor R24 from 1k ohms to 1.2k ohms. Resistor R24 was 19B800607P102. Changed all fault detector biasing resistors to 1% tolerance for tighter control.

Resistor R3 was 19B800607P103 (10K)	Resistor R75 was 19B800607P332 (3.3K)
Resistor R4 was 19B800607P102 (1K)	Resistor R76 was 19B800607P820 (82 $\Omega$ )
Resistor R11 was 19B800607P331 (330 $\Omega$ )	Resistor R78 was 19B800607P392 (3.9K)
Resistor R12 was 19B800607P103 (10K)	Resistor R79 was 19B800607P272 (2.7K)
Resistor R23 was 19B800607P821 (820 $\Omega$ )	Resistor R80 was 19B800607P682 (6.8K)
Resistor R24 was 19B800607P102 (1K)	Resistor R81 was 19B800607P682 (6.8K)
Resistor R25 was 19B800607P392 (3.9K)	Resistor R82 was 19B800607P103 (10K)
Resistor R63 was 19B800607P332 (3.3K)	


### **REV. E – RECEIVER IF MODULE 19D902494G7 & G11**

To permit the usage of different vendor ICs in location U6. Added capacitor C92.


**U1**  
**Silicon Bipolar IC**  
**344A3740P1**

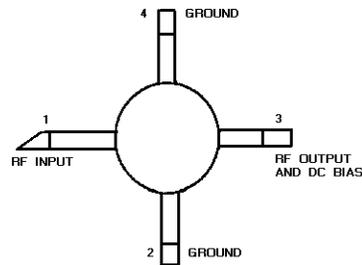


**U2**  
**8-Bit Shift Register**  
**19A703987P324**

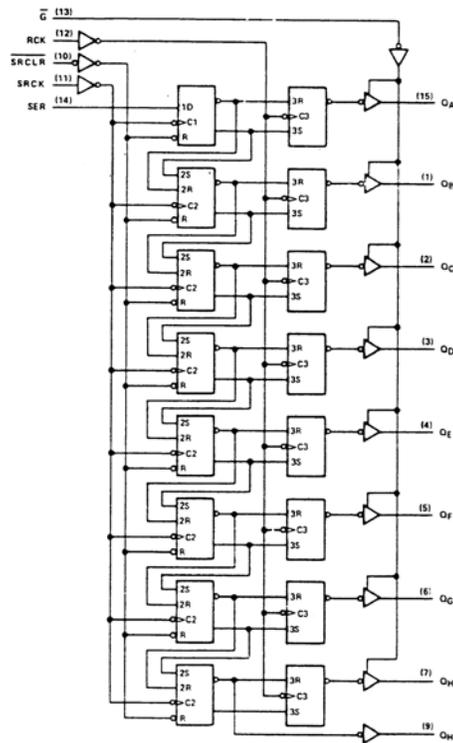


Pin numbers shown are for D, J, and N packages.

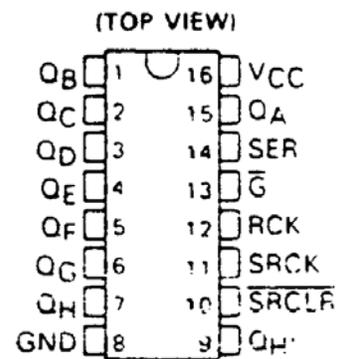


**U3**  
**FM Receiver**  
**19A705535P3**

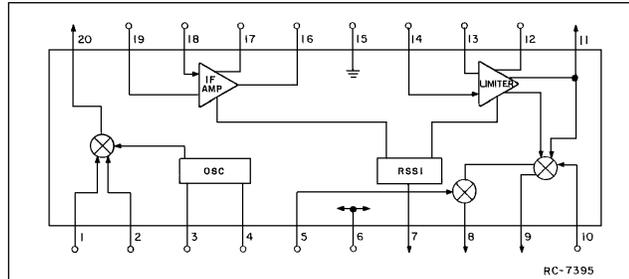

**U4 & U5**  
**Quad Comparator**  
**19A704125P1**

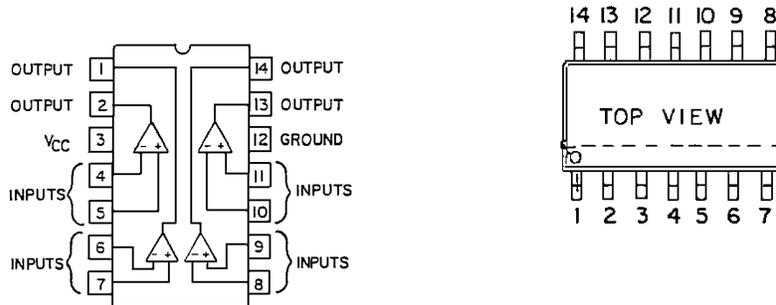


**U6**  
**Rail-to-Rail Operational**  
**Amplifier**  
**RYT 101 6140/2**



Terminal	Symbol	Function
1	OUT <sub>1</sub>	Output 1
2	IN <sub>1</sub> -	Inverting input 1
3	IN <sub>1</sub> +	Non-inverting input 1
4	V <sub>CC</sub> +	Positive supply voltage
5	IN <sub>2</sub> +	Non-inverting input 2
6	IN <sub>2</sub> -	Inverting input 2
7	OUT <sub>2</sub>	Output 2
8	OUT <sub>3</sub>	Output 3
9	IN <sub>3</sub> -	Inverting input 3
10	IN <sub>3</sub> +	Non-inverting input 3
11	V <sub>CC</sub> -	Negative supply voltage
12	IN <sub>4</sub> +	Non-inverting input 4
13	IN <sub>4</sub> -	Inverting input 4
14	OUT <sub>4</sub>	Output 4

**U7**  
**Quad Operational Amplifiers**  
**19A701789P4**

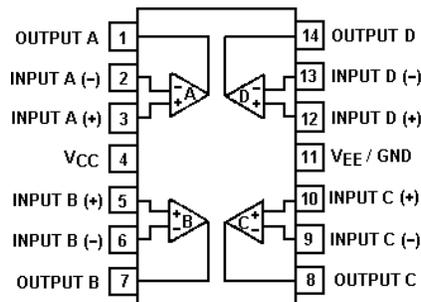

**U8**  
**+8 Volt Regulator**  
**19A704971P10**



**U10**  
**+5 Volt Regulator**  
**19A704971G9**

(Heatsink surface connected to Pin 2)




**PIN 1. INPUT**  
**2. GROUND**  
**3. OUTPUT**

**U9**  
**3-8 Inverting Line Decoder/Demultiplexer**  
**344A3064P201**

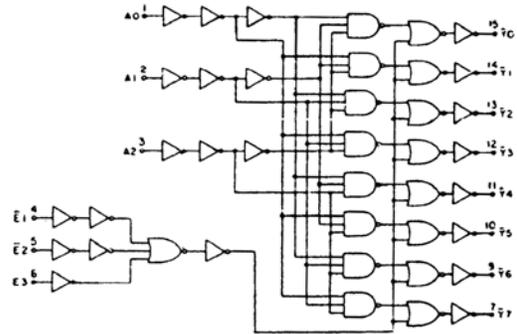


**U11**  
**Bilateral Switch**  
**RYT3066018/C**

LOGIC DIAGRAM (PER CHANNEL)






PIN ASSIGNMENT




**U12**  
**Quad 2-Input OR Gate**  
**19A703483P311**

LOGIC DIAGRAM

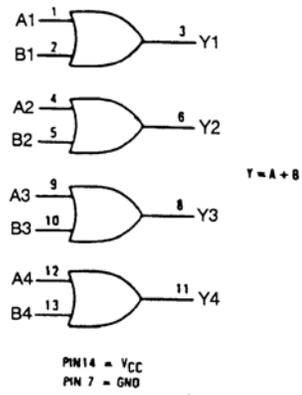

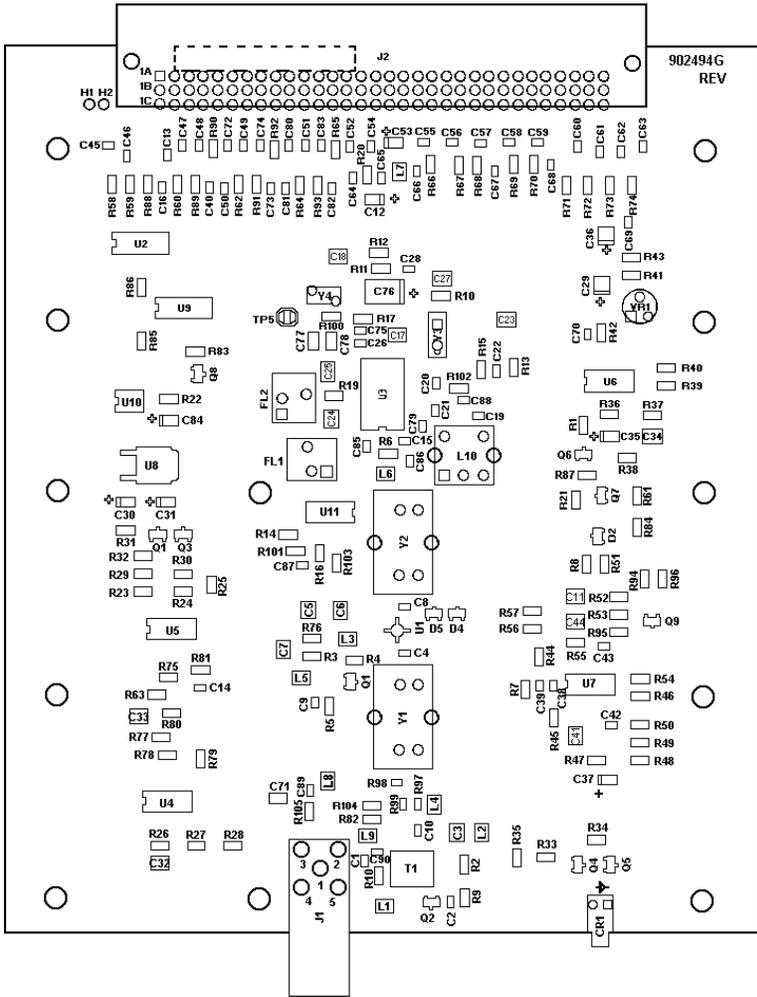


LEAD IDENTIFICATION FOR  
D1, D2, D4, D5  
(SOT) DIODES  
(TOP VIEW)



7 ITEM 19, PAD, USED  
UNDER Y3

LEAD IDENTIFICATION FOR  
U1  
(TOP VIEW)  
GROUND (2)  
(3) RF OUTPUT  
AND DC BIAS  
(1) RF INPUT  
GROUND (4)

LEAD IDENTIFICATION FOR  
Q1-Q3  
(SOT) TRANSISTORS  
(TOP VIEW)




**CAUTION**  
OBSERVE PRECAUTIONS  
FOR HANDLING  
**ELECTROSTATIC  
SENSITIVE  
DEVICES**


**RECEIVER IF MODULE (EARLIER VERSION)  
19D902494G7&G11**

(19D902494, Sh.3, Rev. 6)


# OUTLINE DIAGRAM

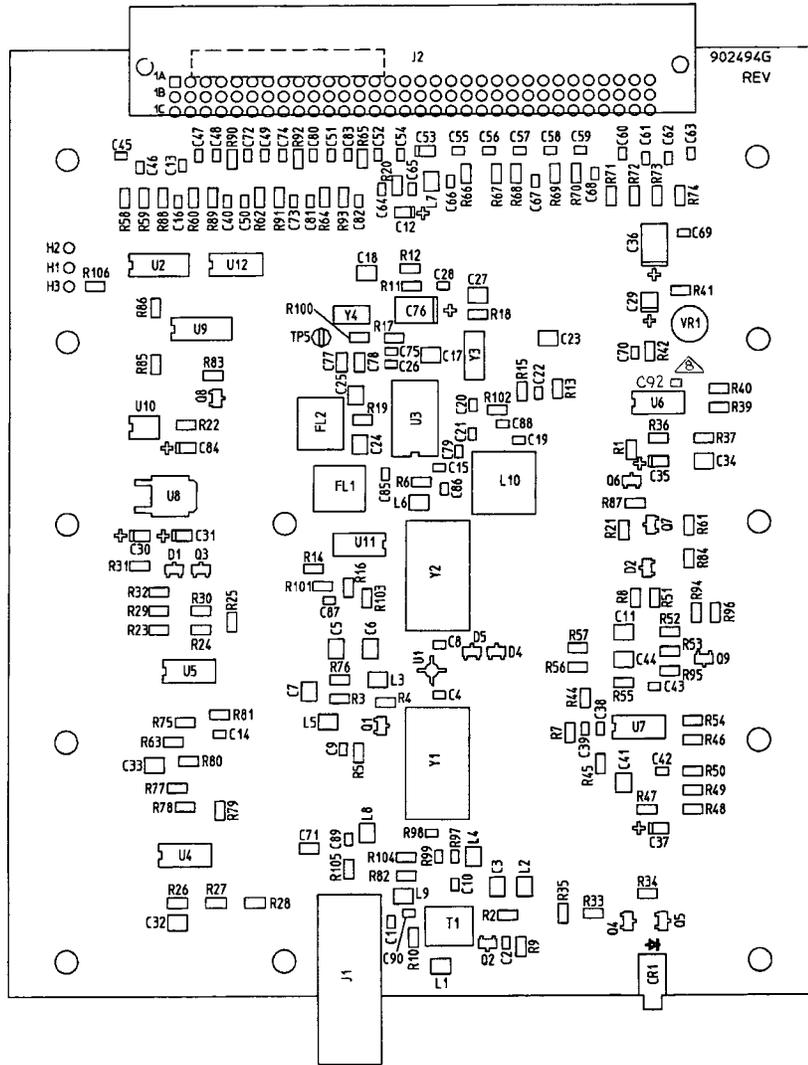


LEAD IDENTIFICATION FOR  
D1,D2,D4,D5  
(SOT) DIODES  
(TOP VIEW)



LEAD IDENTIFICATION FOR  
U1  
(TOP VIEW)  
GROUND (2)




LEAD IDENTIFICATION FOR  
Q1-Q9  
(SOT) TRANSISTORS  
(TOP VIEW)



## RECEIVER IF MODULE 19D902494G7&G11

(19D902494, Sh.4, Rev. 9)


**M/A-COM Wireless Systems**  
3315 Old Forest Road  
Lynchburg, Virginia 24501  
(Outside USA, 434-385-2400) Toll Free 800-528-7711  
[www.macom-wireless.com](http://www.macom-wireless.com)

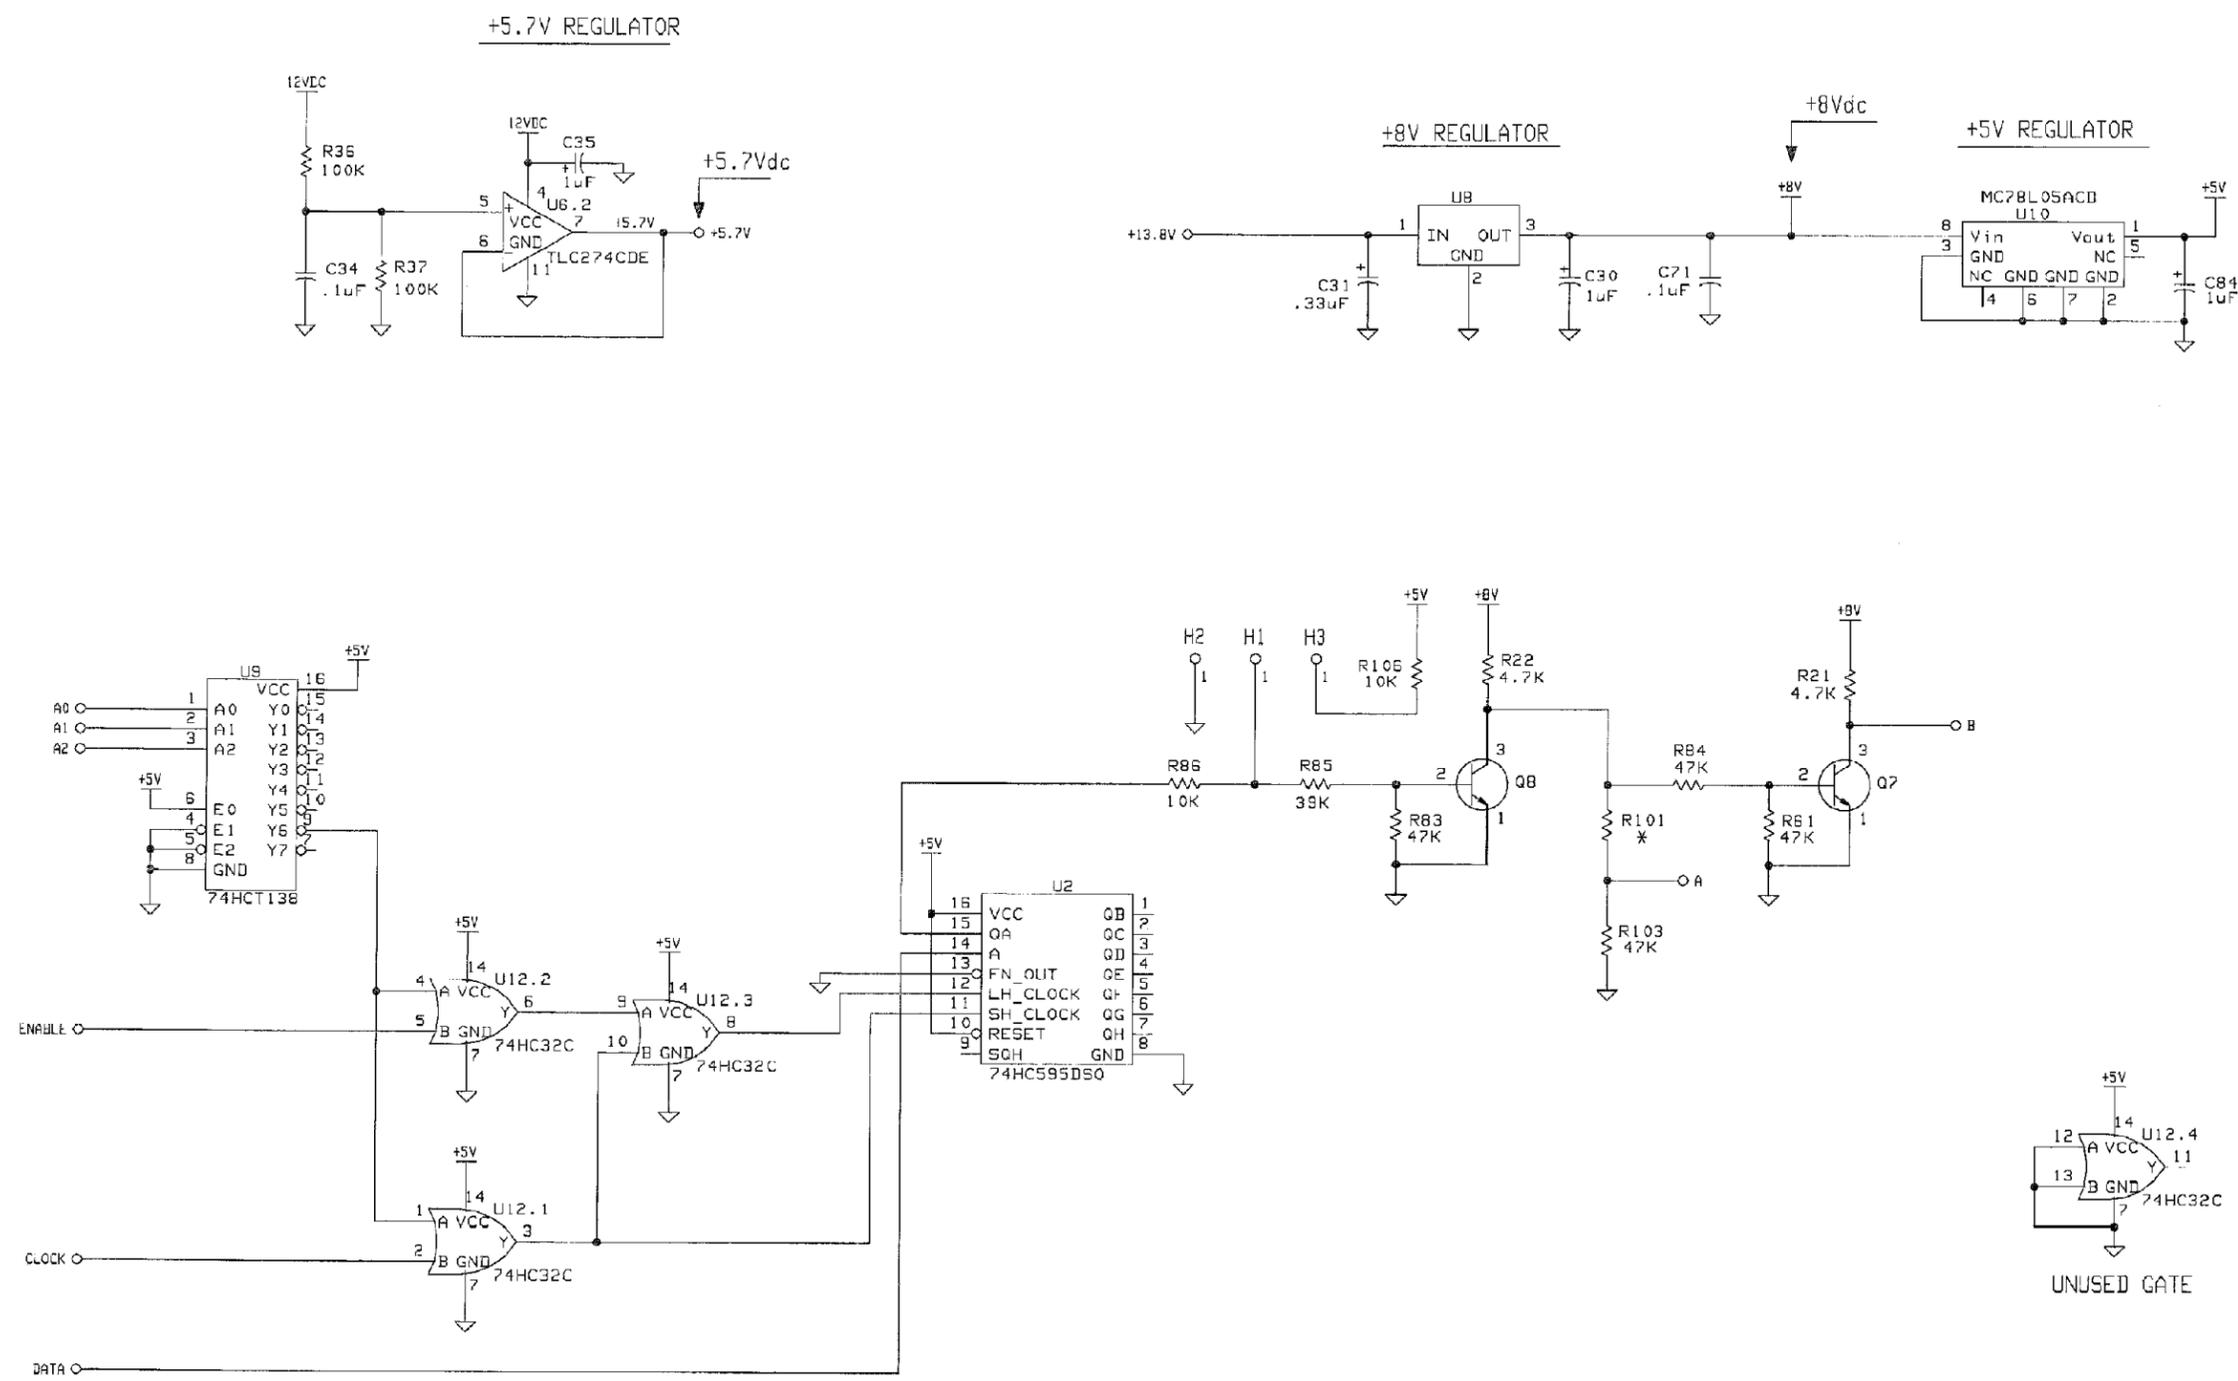

**RECEIVER IF MODULE  
19D902494G7&G11**


(193D1065, Sh. 3, Rev. 6)

**SCHEMATIC DIAGRAM**

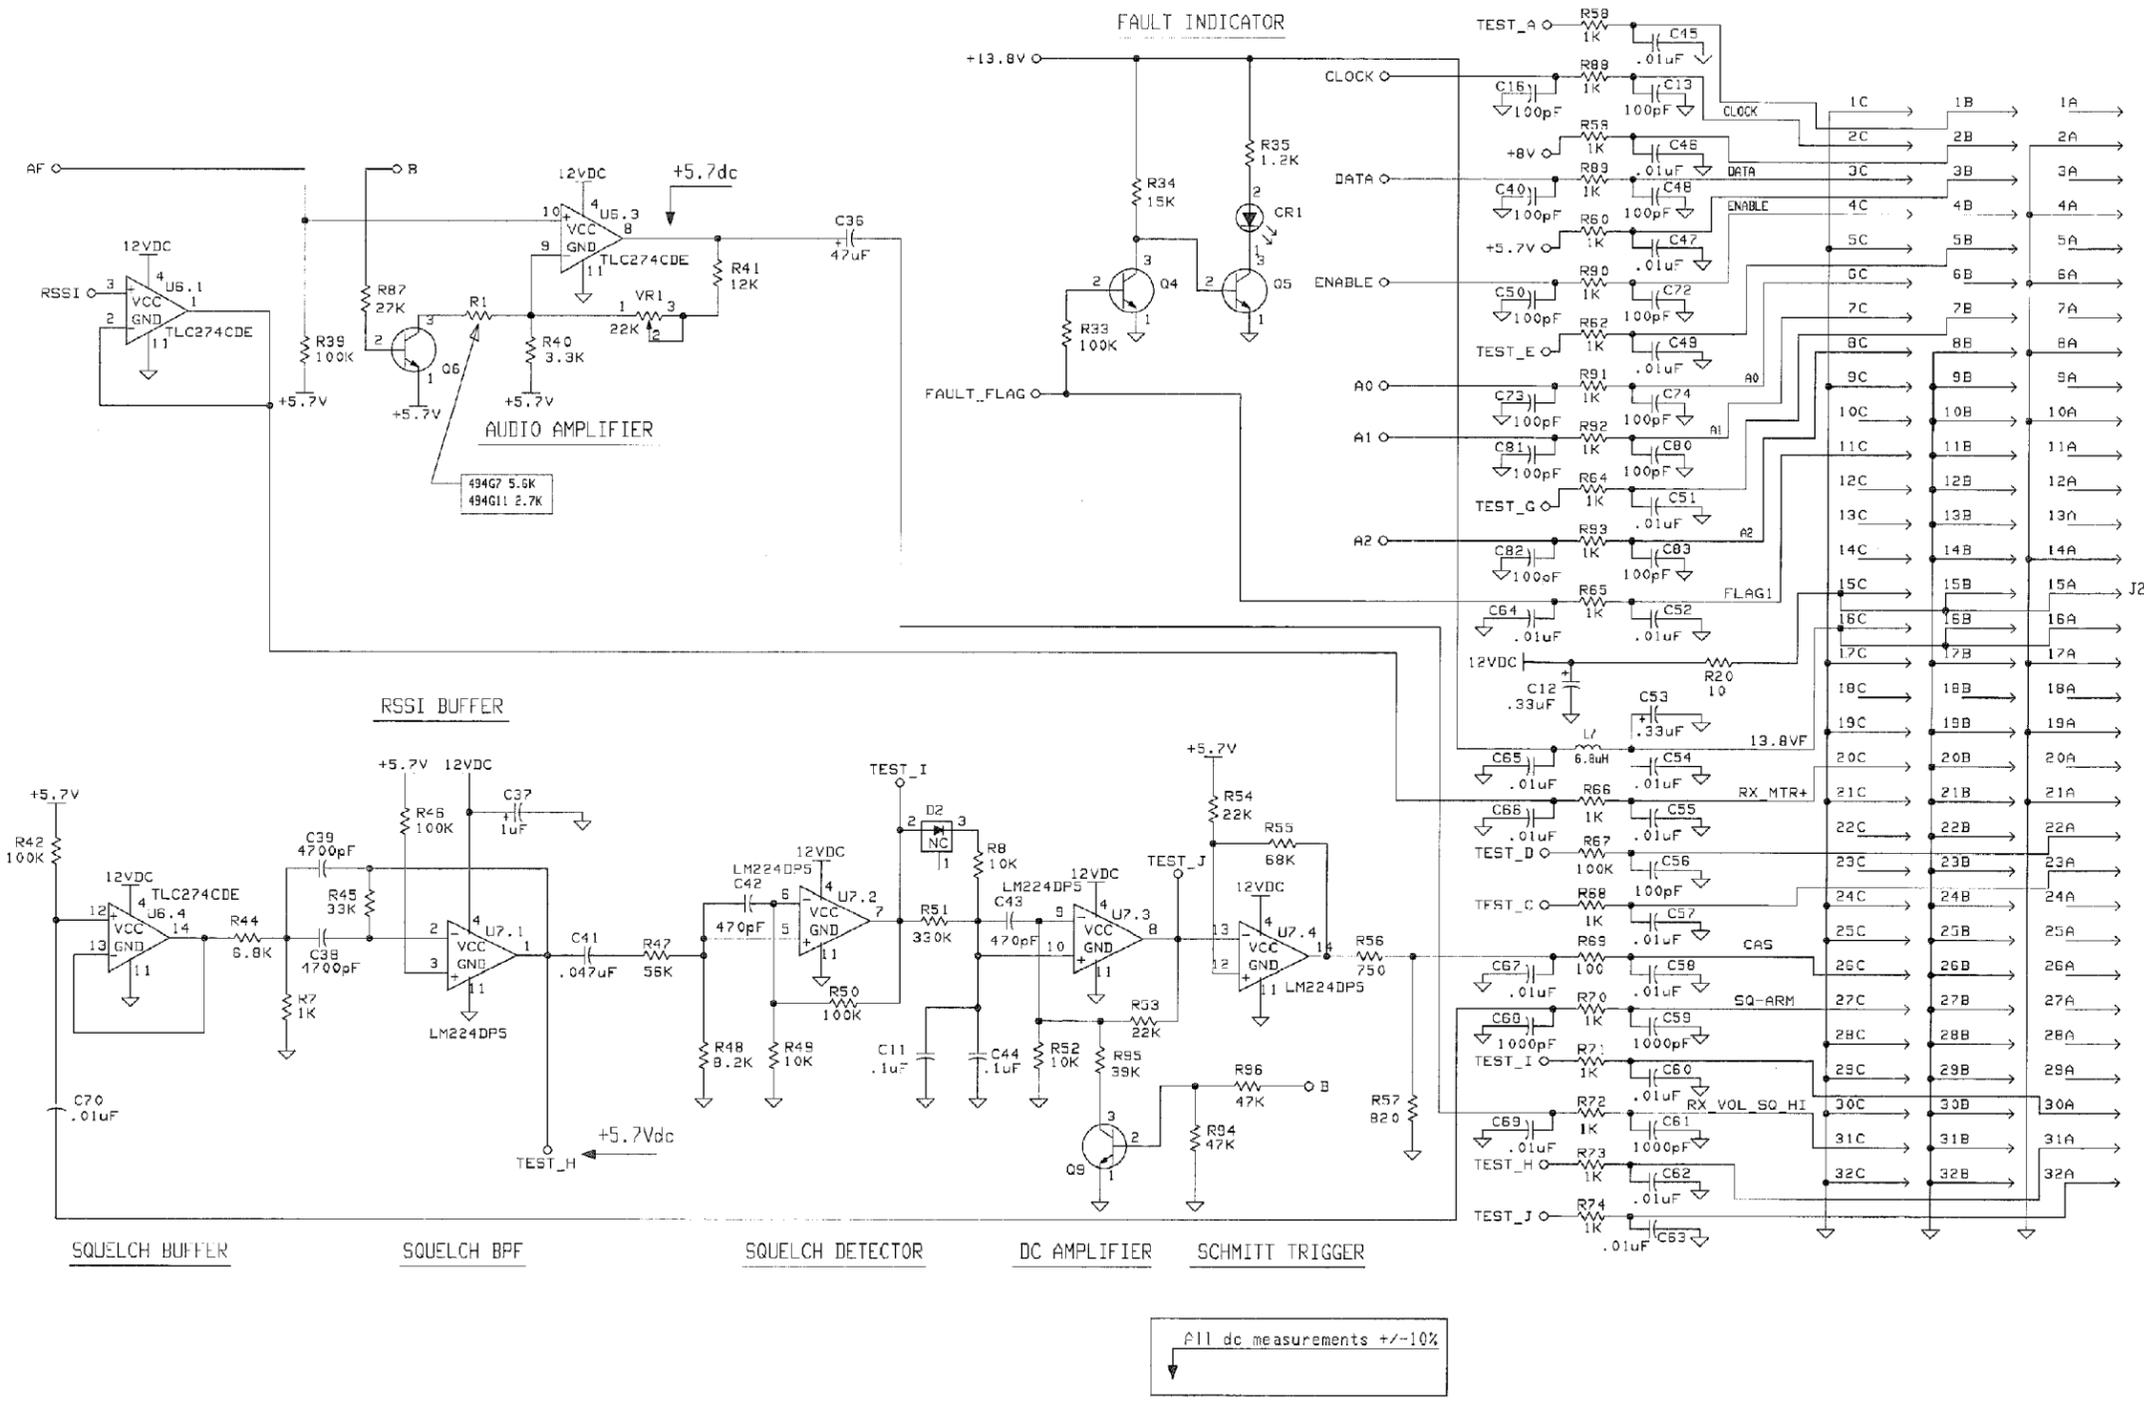

**RECEIVER IF MODULE  
19D902494G7&G11**

(193D1065, Sh. 2, Rev. 6)

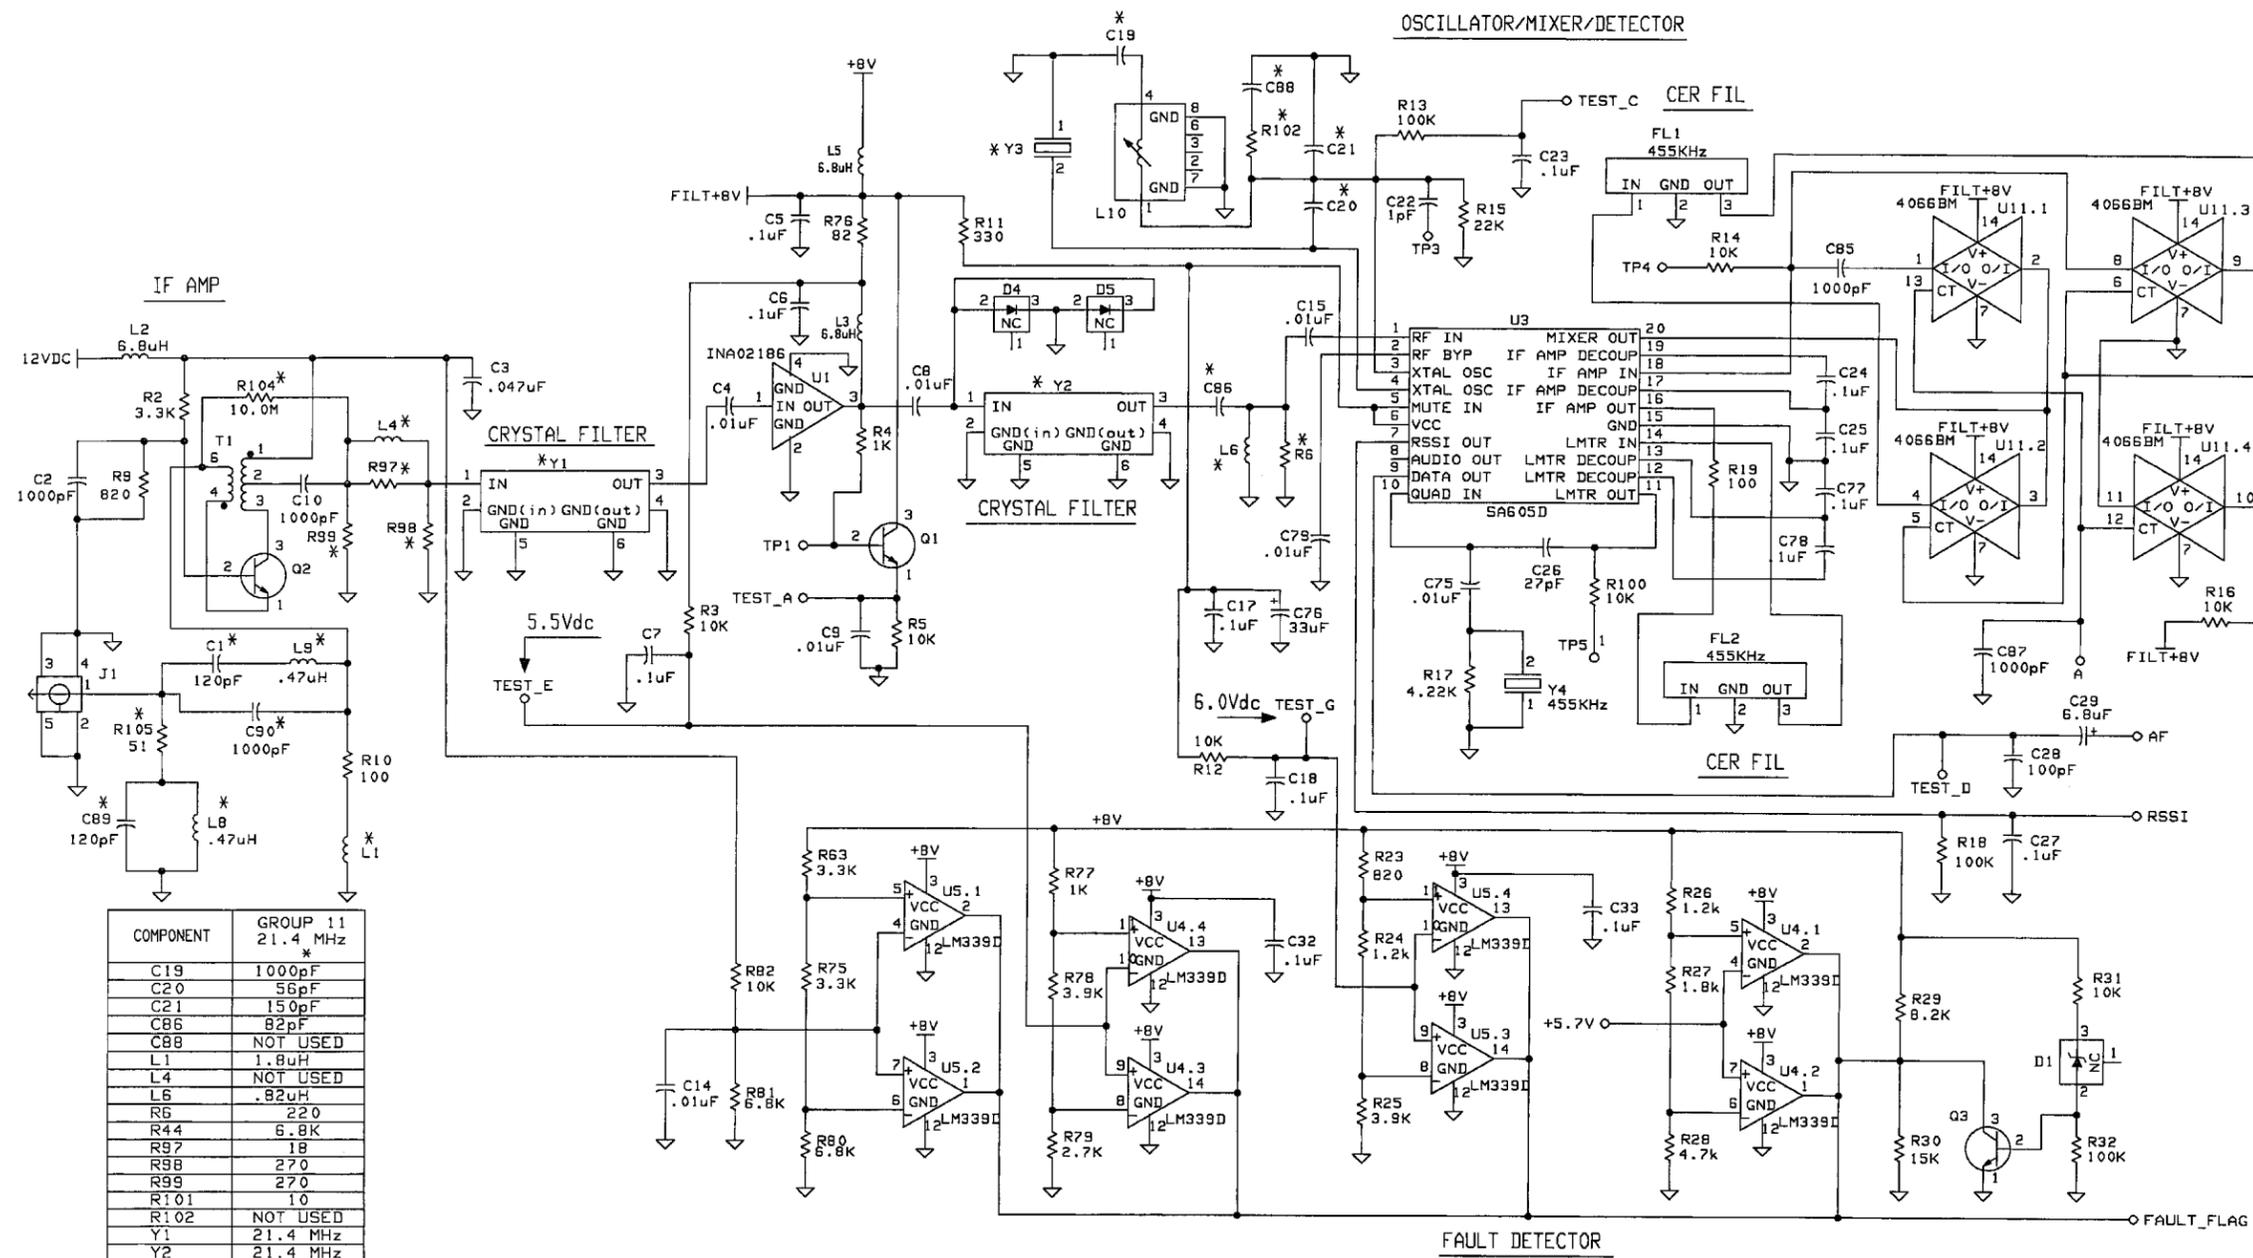

COMPONENT	GROUP 11 21.4 MHz
C19	1000pF
C20	56pF
C21	150pF
C86	82pF
C88	NOT USED
L1	1.8uH
L4	NOT USED
L6	.82uH
R6	220
R44	6.8K
R97	18
R98	270
R99	270
R101	10
R102	NOT USED
Y1	21.4 MHz
Y2	21.4 MHz
Y3	20.945 MHz
C90	NOT USED
R105	51
C89	120pF
L8	.47uH
C1	120pF
L9	.47uH
R104	NOT USED


THIS SCHEMATIC DIAGRAM APPLIES TO	
MODEL NO.	REV LETTER
PL19D902494G7	E
PL19D902494G11	E
PL19D902783G7	A
PL19D902783G11	A

All dc measurements +/-10%

**RECEIVER IF MODULE  
19D902494G7&G11**


(193D1065, Sh. 1, Rev. 7)

**SCHEMATIC DIAGRAM**

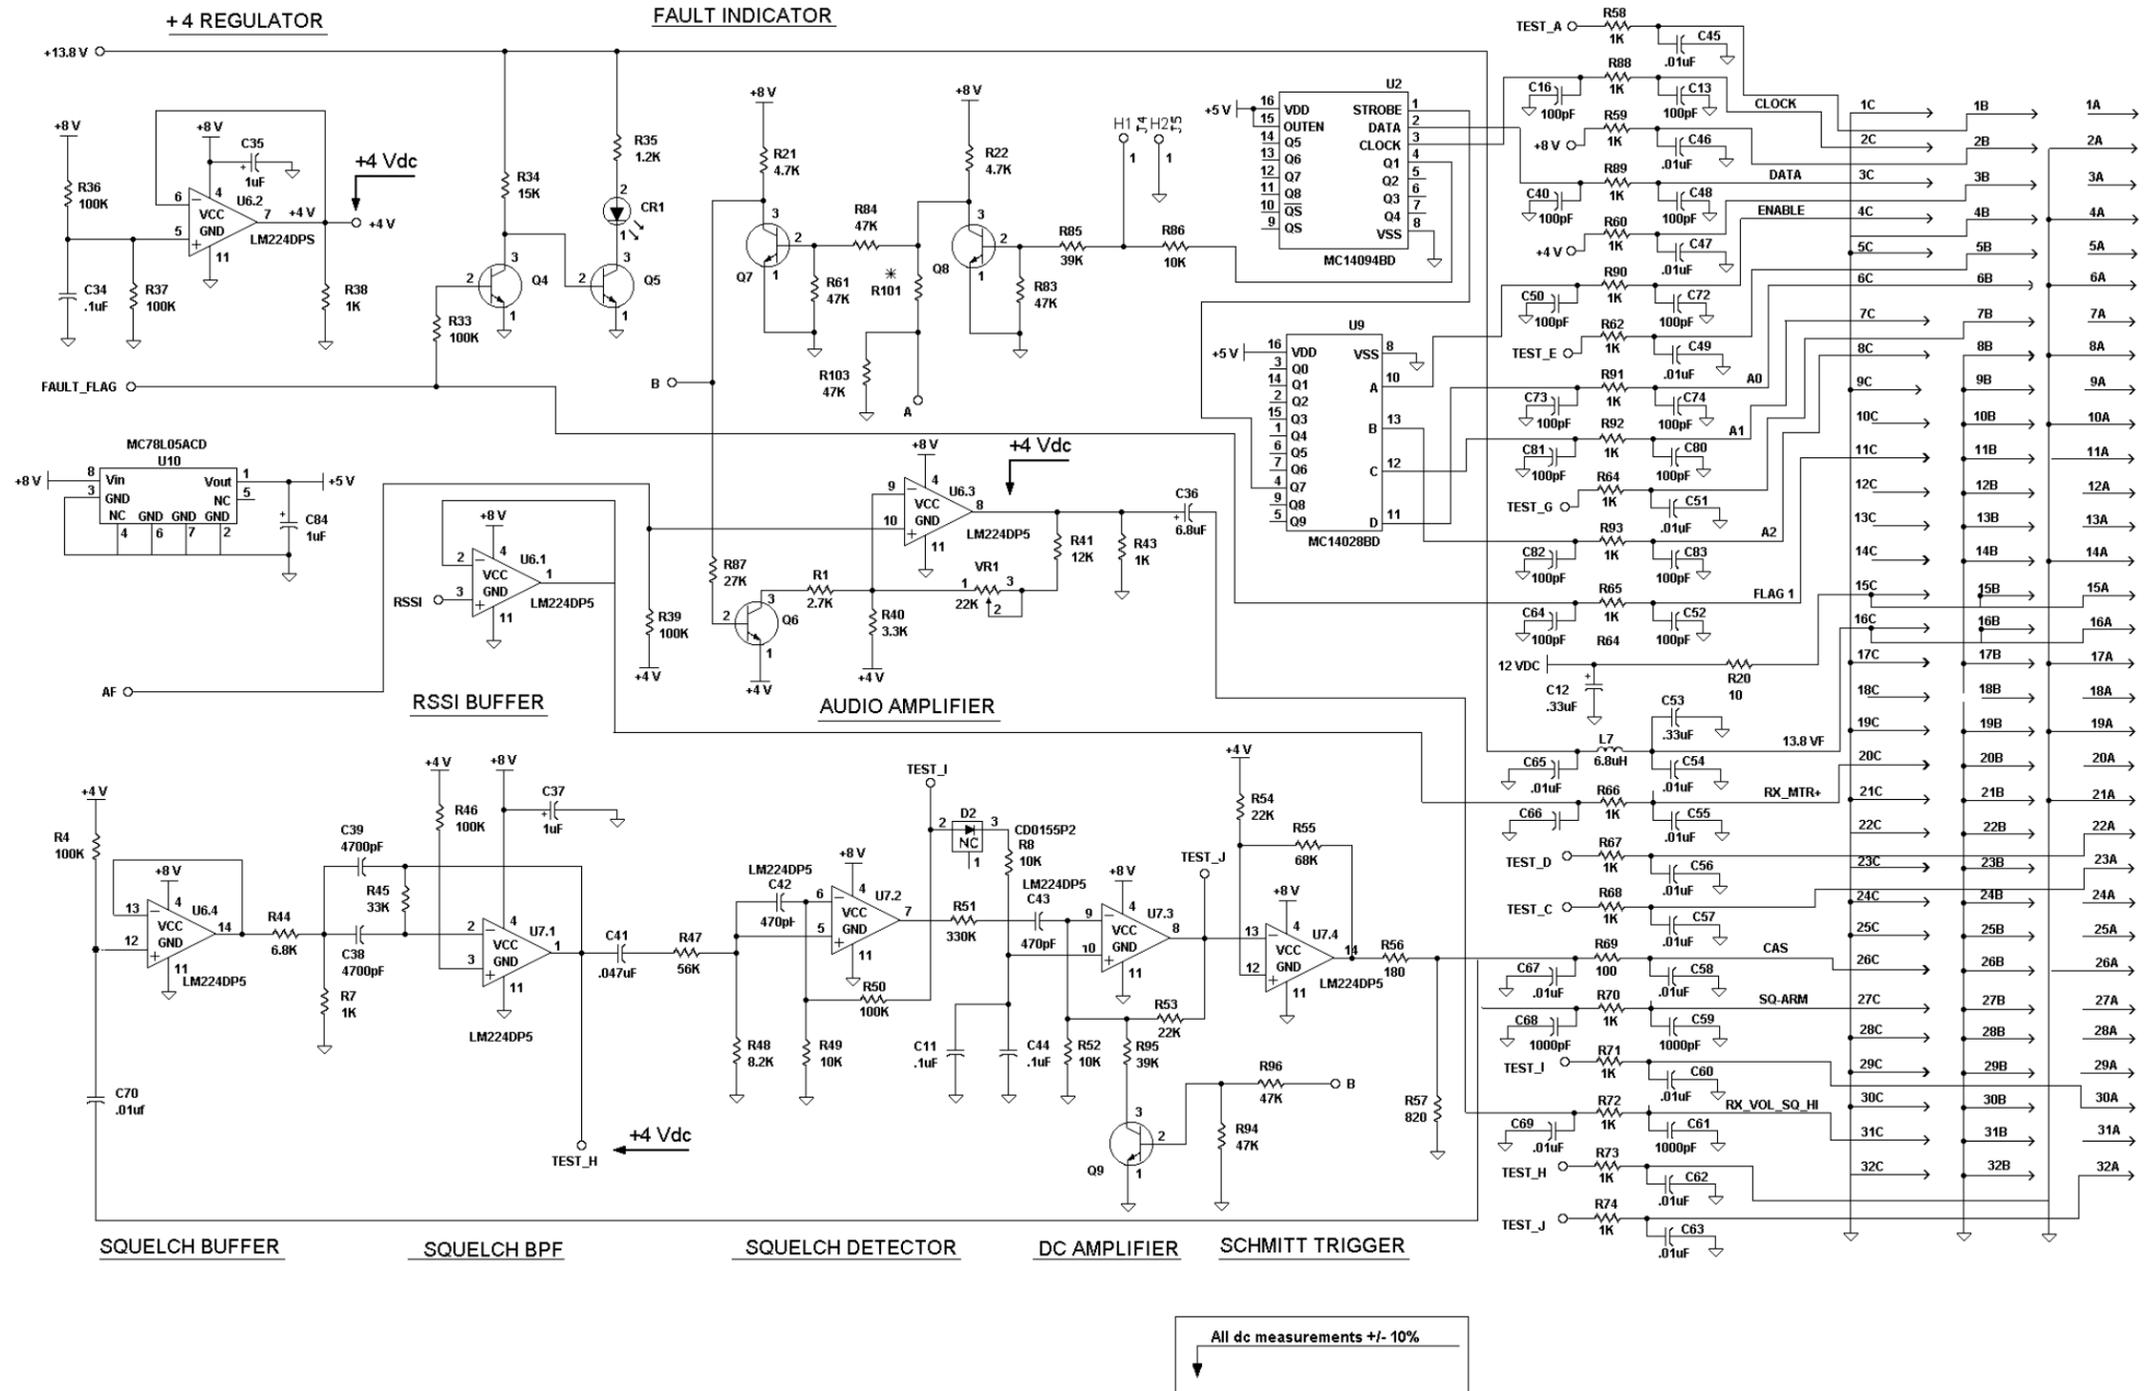

**RECEIVER IF MODULE (EARLIER VERSION)  
19D902494G7&G11**

(188D5586, Sh. 2, Rev. 3)

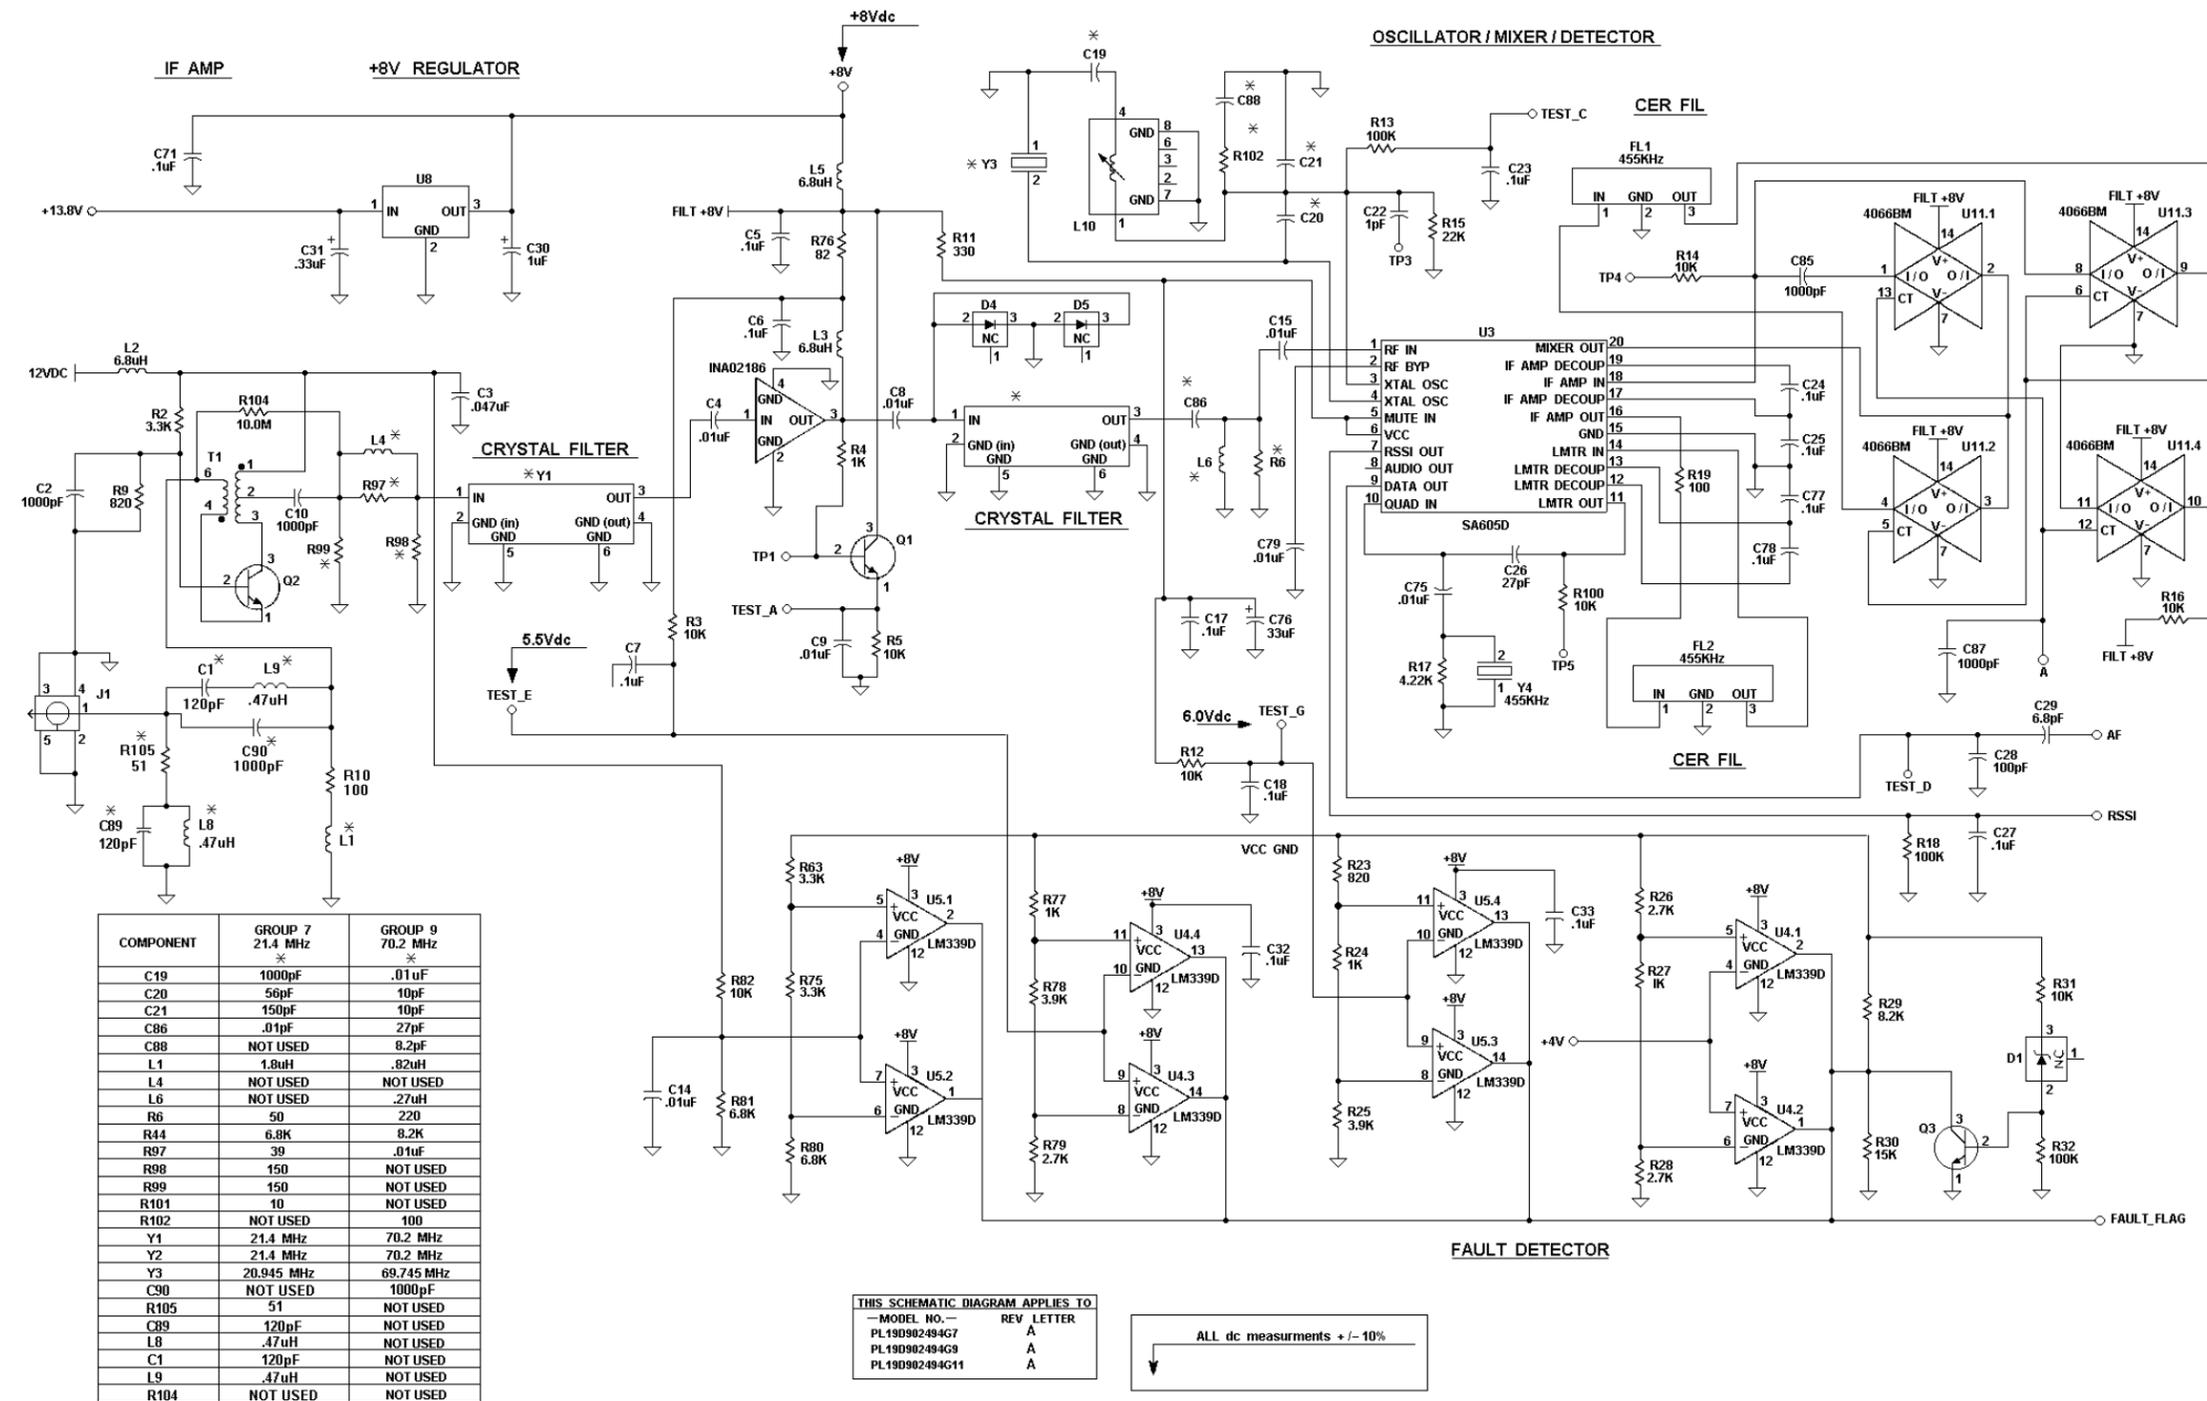

**RECEIVER IF MODULE (EARLIER VERSION)  
19D902494G7&G11**

(188D5586, Sh. 1, Rev. 3)